

# DEVELON

## Crawler Excavator

# DX260LC-9



### Engine

Make	DEVELON
Model	DX05V
Number of cylinders	4
Rated power, gross (hp per SAE J1995)	229.4 hp (171.1 kW) @ 1900 rpm
Rated power, net (hp per SAE J1349)	220.9 hp (164.7 kW) @ 1900 rpm
Max. torque, gross (SAE J1995)	704.5 ft.-lb. (955.2 Nm) @ 1400 rpm
Displacement	306.2 in. <sup>3</sup> (5.0 L)
Bore and stroke	4.3" x 5.2" (110 mm x 132 mm)
Starter	24 V, 8.0 hp (6.0 kW)
Battery	2 x 12 V, 150 AH
Alternator	24 V, 90 A
Air cleaner	Three-stage

### Hydraulics

Main pumps	2 x 62.7 gpm (2 x 237.5 L/min.)
Pilot pump (gear design)	7.1 gpm (27.0 L/min.)

### Working Pressure

Boom/arm/bucket (normal mode)	4978.2 psi (350.0 kg/cm <sup>2</sup> )
Boom/arm/bucket (power boost)	5404.9 psi (380.0 kg/cm <sup>2</sup> )
Travel	4978.2 psi (350.0 kg/cm <sup>2</sup> )
Swing	4061.1 psi (286.0 kg/cm <sup>2</sup> )
Pilot	568.9 psi (40.0 kg/cm <sup>2</sup> )

### Undercarriage

Upper rollers (each track)	2
Lower rollers (each track)	9
Number of shoes (links per side)	51

### Swing Mechanism

Max. swing speed	10.6 rpm
Max. swing torque	74346.3 lbf.-ft. (10279.0 kgf-m)

### Drive System

Travel speed (low – high)	2.1 – 3.6 mph (3.4 – 5.8 km/h)
Traction force, max. (drawbar pull)	63553.5 lbf. (28827.0 kgf)
Max. grade (limited by engine lub)	70% (35°)

### Environment

Sound level (2000/14/EC)	103 dB(A)
Cabin sound level (ISO 6396)	70 dB(A)

### Refill Capacities

Fuel tank	121.0 gal. (458.0 L)
DEF tank	15.1 gal. (57.2 L)
Cooling system (radiator capacity)	8.1 gal. (30.6 L)
Engine oil (with filter)	6.9 gal. (26.0 L)
Swing drive	2.2 gal. (8.4 L)
Final drive (each side)	1.0 gal. (3.8 L)
Hydraulic system	87.2 gal. (330.0 L)
Hydraulic tank	38.6 gal. (146.0 L)

All capacities are approximate values. Always refer to the machine's OM for exact refill levels. Check the dipstick, level eye, level plug, etc., to achieve the correct level.

### Hydraulic Cylinders

Boom <sup>1</sup> (2) bore x rod diameter x stroke	5.1" x 3.5" x 53.7" (130 mm x 90 mm x 1365 mm)
Arm <sup>1,2</sup> (1) bore x rod diameter x stroke	5.7" x 4.1" x 65.2" (145 mm x 105 mm x 1655 mm)
Bucket (STD) <sup>1</sup> (1) bore x rod diameter x stroke	5.1" x 3.3" x 42.5" (130 mm x 85 mm x 1080 mm)

<sup>1</sup> Cushion on rod end

<sup>2</sup> Cushion on base end


The piston rods and cylinder bodies are made of high-strength steel. A shock-absorbing mechanism is fitted in all cylinders to ensure shock-free operation and extended piston life.

NOTE: Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) and ISO standards. Specifications and design are subject to change without notice. All dimensions are given for DEVELON excavators equipped with standard tracks and the standard front as listed. Pictures of DEVELON excavators may show other than standard equipment. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. Rounding may impact specifications. DEVELON equipment is manufactured with a Quality Management System that is in compliance with ISO 9001:2008.

# Dimensions

		Standard Arm 31.5" (800 mm) TG Shoe (US20/US25)	Long Arm 35.4" (900 mm) TG Shoe (US30/US35)
Boom length	A	19' 4.3" (5900 mm)	
Arm length		9' 10.1" (3000 mm)	11' 5.8" (3500 mm)
Bucket size (SAE)		1.53 yd <sup>3</sup> (1.17 m <sup>3</sup> )	1.37 yd <sup>3</sup> (1.05 m <sup>3</sup> )
Tail swing radius	A	10' 0.0" (3040 mm)	
Shipping height (boom)	B	9' 10.7" (3015 mm)	11' 1.1" (3380 mm)
Shipping height (hose)	C	10' 7.4" (3235 mm)	11' 9.6" (3597 mm)
Shipping length	D	33' 1.0" (10085 mm)	33' 2.0" (10110 mm)
Shipping width	E	11' 1.9" (3400 mm)	11' 5.8" (3500 mm)
Counterweight clearance	F	3' 7.7" (1110 mm)	
Cabin height	G	10' 2.8" (3120 mm)	
Upper structure width	H	8' 10.7" (2710 mm)	
Cabin height above house	I	2' 0.6" (625 mm)	
Cabin width	J	3' 3.8" (1010 mm)	
Tumbler distance	K	12' 7.0" (3835 mm)	
Overall track length	L	15' 2.3" (4630 mm)	
Undercarriage width	M	11' 1.9" (3400 mm)	11' 5.8" (3500 mm)
Track shoe width	N	31.5" (800 mm)	35.4" (900 mm)
Track height*	O	3' 1.0" (940 mm)	
Car body clearance*	P	1' 4.7" (425 mm)	


\*Without shoe grouser

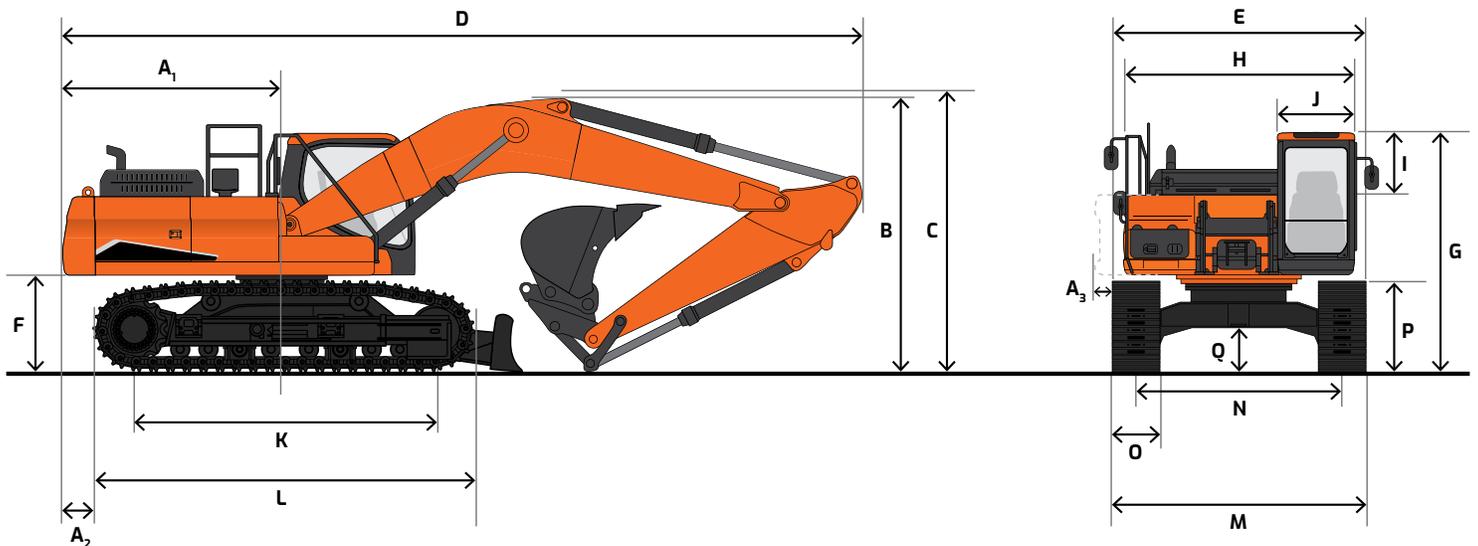

# Working Range

		Standard Arm 31.5" (800 mm) TG Shoe (US20/US25)	Long Arm 35.4" (900 mm) TG Shoe (US30/US35)
Boom length		19' 4.3" (5900 mm)	
Arm length		9' 10.1" (3000 mm)	11' 5.8" (3500 mm)
Bucket size (SAE)		1.53 yd <sup>3</sup> (1.17 m <sup>3</sup> )	1.37 yd <sup>3</sup> (1.05 m <sup>3</sup> )
Counterweight		12125 lb. (5500 kg)	
Track type		Fixed	
Max. digging reach	A	33' 4.4" (10170 mm)	34' 9.3" (10600 mm)
Max. digging reach (ground)	B	32' 9.3" (9990 mm)	34' 2.6" (10430 mm)
Max. digging depth	C	22' 4.1" (6810 mm)	23' 11.8" (7310 mm)
Max. loading height	D	23' 0.6" (7025 mm)	23' 6.3" (7170 mm)
Min. loading height	E	8' 6.4" (2600 mm)	6' 10.3" (2090 mm)
Max. digging height	F	32' 0.6" (9770 mm)	32' 5.4" (9890 mm)
Max. bucket pin height	G	27' 10.3" (8490 mm)	28' 4.2" (8640 mm)
Max. vertical wall depth	H	19' 5.7" (5935 mm)	20' 7.0" (6275 mm)
Max. radius vertical	I	20' 11.0" (6375 mm)	21' 9.4" (6640 mm)
Max. depth to 8' line	J	21' 8.4" (6615 mm)	23' 4.9" (7135 mm)
Min. radius to 8' line	K	9' 7.2" (2925 mm)	9' 6.6" (2910 mm)
Min. digging reach	L	2' 3.2" (690 mm)	7.7" (195 mm)
Min. swing radius	M	12' 2.3" (3715 mm)	12' 3.8" (3755 mm)
Bucket angle (DEG)	d	174°	175°
Digging force, bucket*	ISO	43652.0 lbf. (19800 kgf)	
Digging force, arm*		31306.0 lbf. (14200 kgf)	28881.0 lbf. (13100 kgf)
Operating weight		60407 lb. (27400 kg)	
Ground pressure		6.0 psi (0.42 kg/cm <sup>2</sup> )	5.2 psi (0.37 kg/cm <sup>2</sup> )

\*With power boost ON

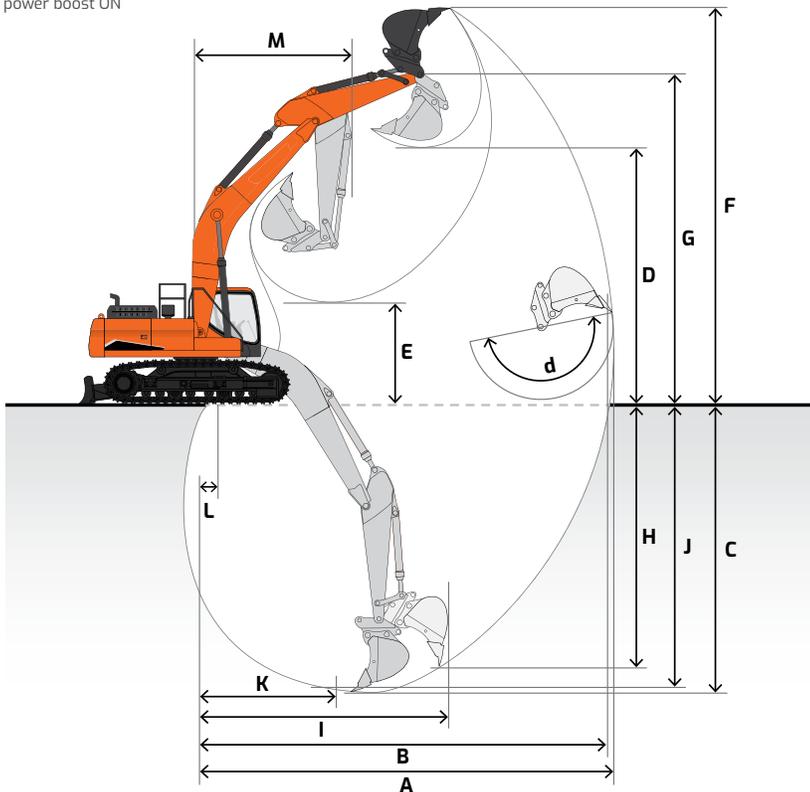

# Lifting Capacity

 Rating over front     Rating over side or 360°


## DX260LC-9 US20/US25

Boom: 19' 4.3" (5900 mm) | Arm: 9' 10.1" (3000 mm) | Counterweight: 12125 lb. (5500 kg) | 31.5" (800 mm) TG Shoes | No Dozer | Bucket: None | Unit: lb. (kg)

B (ft. or m)	5' (1.5 m)		10' (3.0 m)		15' (4.5 m)		20' (6.0 m)		25' (7.5 m)		Max. Reach		
													A
25' (7.5 m)							* 14540 (* 6590)	* 14540 (* 6590)			* 11610 (* 5270)	* 11610 (* 5270)	21.85' (6.66 m)
20' (6.0 m)							* 14870 (* 6740)	* 14870 (* 6740)	* 13040 (* 5920)	11940 (5420)	* 10990 (* 4990)	* 10990 (* 4990)	25.21' (7.68 m)
15' (4.5 m)					* 19550 (* 8860)	* 19550 (* 8860)	* 16610 (* 7530)	16570 (7520)	* 15160 (* 6870)	11770 (5340)	* 10920 (* 4960)	9970 (4520)	27.28' (8.32 m)
10' (3.0 m)					* 24840 (* 11250)	24190 (10970)	* 19070 (* 8640)	15850 (7180)	* 16280 (* 7370)	11440 (5190)	* 11260 (* 5110)	9230 (4180)	28.35' (8.64 m)
5' (1.5 m)					* 29340 (* 13280)	22800 (10330)	* 21430 (* 9700)	15160 (6870)	16470 (7470)	11100 (5030)	* 12040 (* 5460)	8990 (4070)	28.52' (8.69 m)
Ground Level			* 16680 (* 7560)	* 16680 (* 7560)	* 31370 (* 14200)	22090 (10000)	22520 (10210)	14700 (6660)	16200 (7340)	10840 (4910)	* 13410 (* 6090)	9180 (4160)	27.83' (8.48 m)
-5' (-1.5 m)	* 19110 (* 8670)	* 19110 (* 8670)	* 28950 (* 13130)	* 28950 (* 13130)	* 31070 (* 14060)	21920 (9920)	22310 (10110)	14510 (6570)	16100 (7300)	10760 (4870)	14780 (6700)	9930 (4500)	26.19' (7.98 m)
-10' (-3.0 m)	* 31710 (* 14380)	* 31710 (* 14380)	* 39690 (* 17950)	* 39690 (* 17950)	* 28600 (* 12940)	22100 (10010)	* 21450 (* 9710)	14600 (6610)			* 16960 (* 7670)	11640 (5270)	23.42' (7.14 m)
-15' (-4.5 m)			* 31140 (* 14080)	* 31140 (* 14080)	* 22960 (* 10380)	22680 (10270)					* 16770 (* 7590)	15840 (7170)	19.02' (5.80 m)

A Distance from center of rotation  
B Height

NOTE: Lifting capacities are in compliance with SAE 1097 and ISO 10567. Machine in lifting mode with power boost turned on. Load point is the end of the arm. Rated loads shown do not exceed 75% of minimum tipping loads or 87% of hydraulic capacities. Rated loads marked with an asterisk (\*) are limited by hydraulic capacities. The least stable position is over the side. The total mass of machine includes the mass of the boom arm counterweight all operating fluids and 165 lb. (75 kg) operator.

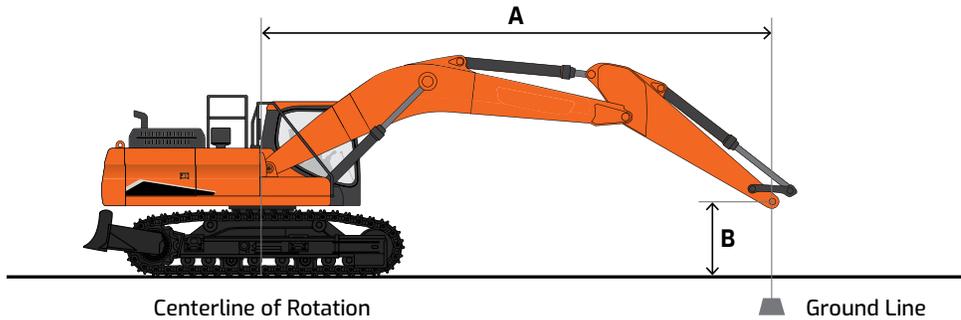

# Lifting Capacity

 Rating over front     Rating over side or 360°


## DX260LC-9 US30/US35

Boom: 19' 4.3" (5900 mm) | Arm: 11' 5.8" (3500 mm) | Counterweight: 12125 lb. (5500 kg) | 35.4" (900 mm) TG Shoes | No Dozer | Bucket: None | Unit: lb. (kg)

A (ft. or m) B (ft. or m)	5' (1.5 m)		10' (3.0 m)		15' (4.5 m)		20' (6.0 m)		25' (7.5 m)		30' (9.0 m)		Max. Reach		
															A
25' (7.5 m)													* 10390 (* 4710)	* 10390 (* 4710)	23.67' (7.21 m)
20' (6.0 m)									* 13430 (* 6090)	12220 (5540)			* 9970 (* 4520)	* 9970 (* 4520)	26.80' (8.17 m)
15' (4.5 m)							* 15390 (* 6980)	* 15390 (* 6980)	* 14190 (* 6440)	12000 (5440)			* 9970 (* 4520)	9310 (4220)	28.75' (8.76 m)
10' (3.0 m)				* 22940 (* 10410)	* 22940 (* 10410)	* 17980 (* 8160)	16220 (7360)	* 15490 (* 7030)	11640 (5280)	* 11240 (* 5100)	8780 (3980)		* 10320 (* 4680)	8670 (3930)	29.77' (9.07 m)
5' (1.5 m)				* 27950 (* 12680)	23360 (10600)	* 20590 (* 9340)	15460 (7010)	16710 (7580)	11260 (5110)	12720 (5770)	8620 (3910)		* 11030 (* 5000)	8440 (3830)	29.94' (9.12 m)
Ground Level			* 19280 (* 8750)	* 19280 (* 8750)	* 30810 (* 13970)	22410 (10160)	* 22450 (* 10190)	14900 (6760)	16370 (7430)	10950 (4970)			* 12240 (* 5550)	8590 (3900)	29.28' (8.92 m)
-5' (-1.5 m)	* 18370 (* 8330)	* 18370 (* 8330)	* 28340 (* 12860)	* 28340 (* 12860)	* 31310 (* 14200)	22060 (10010)	22510 (10210)	14610 (6630)	16200 (7350)	10790 (4890)			13700 (6210)	9210 (4180)	27.74' (8.45 m)
-10' (-3.0 m)	* 28700 (* 13020)	* 28700 (* 13020)	* 41350 (* 18760)	* 41350 (* 18760)	* 29670 (* 13460)	22130 (10040)	* 22170 (* 10060)	14610 (6630)	16270 (7380)	10850 (4920)			15810 (7170)	10570 (4800)	25.13' (7.66 m)
-15' (-4.5 m)	* 42050 (* 19070)	* 42050 (* 19070)	* 35160 (* 15950)	* 35160 (* 15950)	* 25330 (* 11490)	22580 (10240)	* 18510 (* 8400)	14950 (6780)					* 16560 (* 7510)	13680 (6200)	21.08' (6.43 m)

A Distance from center of rotation  
B Height

NOTE: Lifting capacities are in compliance with SAE 1097 and ISO 10567. Machine in lifting mode with power boost turned on. Load point is the end of the arm. Rated loads shown do not exceed 75% of minimum tipping loads or 87% of hydraulic capacities. Rated loads marked with an asterisk (\*) are limited by hydraulic capacities. The least stable position is over the side. The total mass of machine includes the mass of the boom arm counterweight all operating fluids and 165 lb. (75 kg) operator.

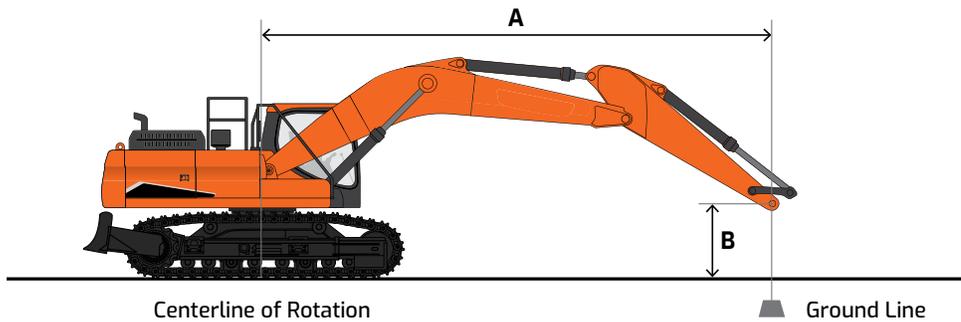

# Standard & Optional Equipment

■ Standard    ● Optional

## Engine

Emissions (EPA), T4f	■
High-pressure common-rail (HPCR)	■
Twin turbo	■
Cooled exhaust gas recirculation (CEGR)	■
Diesel oxidation catalyst (DOC)	■
Selective catalytic reduction (SCR)	■
Diesel exhaust fluid (DEF)	■
Fuel filter with water separator	■
Coolant expansion tank	■
Dual element dry-type air filter with evacuator	■
Pre-cleaner	■
Electronic engine control (ECU)	■
Auto idle	■
Auto shutdown (time-adjustable)	■
Overheat & low oil pressure engine protection	■
Water separator with heater	■

## Hydraulic

Electronic Power Optimizing System (EPOS)	■
Variable axial piston main pump (tandem)	■
Cross-sensing pump control	■
Full-electric hydraulics	■
Gear pilot pump	■
Smart Power Control (SPC)	■
Variable-speed hydraulic cooling fan	■
Axial piston swing motor	■
Spring-applied hydraulic release brake	■
Axial piston travel motor (high/low, auto)	■
Auxiliary hydraulics, one- & two-way piping	■
Auxiliary hydraulics, tilt/rotate piping	■
Adjustable auxiliary flow & pressure, 10 presets	■
Intelligent floating boom	■
Boom & arm lock valves	●
Clamshell piping	●
Straight travel	■

## Controls

Electronic joystick controls	■
Proportional control on joystick switches for auxiliary hydraulic lines	■
Customizable joystick buttons - Right (two on front, two on back) - Left (two on front, two on back)	■
Foot pedal attachment control	■
Control stands - Height adjustable - Sliding (fore/aft) - Tilting armrests	■
Engine speed control dial	■
Travel pedals with hand levers	■
Straight travel pedal	■
Stick steer (joystick steering functionality)	■
Multifunction keypad - Intelligent floating boom - Swing lock	■
Keypad - Lower wiper & washer - Upper wiper, Panto wiper & washer - Light	■
Emergency stop switch	■
Power modes (P+, P, S, E)	■
Work modes (digging, lifting, breaker, shear)	■
Jog dial display control	■
Hydraulic flow & pressure rate controlled from cab	■

## Cabin

Steel, all-weather & sound-suppressed	■
ROPS (ISO 12117-2:2008)	■
Viscous mount with spring reinforcement	■
Front window with wiper/washer	■
Tinted safety glass	■
Skylight top hatch with sun screen	■
Front window with sun screen	■
Pull-up type top front window	■
Removable lower front window with storage behind seat	■
Wiper, lower window	■
Adjustable sliding side door window	■
Defrost, front window	■
Lockable doors	■
Seat - Heated - Air-suspension - 3" two point seat belt	■
Leatherette seat - Heating & cooling - Air-suspension - 2" three point seat belt	●
Control stands - Height adjustable - Mounted to seat base	■
Storage for operator's manuals	■
Mirrors	■
Fully automatic HVAC with radian energy photo sensor	■
New 12" Android touchscreen full HD monitor	■
Additional 12" monitor	■
Digital Bluetooth® & MP3 radio with cell phone integration	■
Wireless phone charger	■
Speakers (2)	■
Emergency breakout tool	■
Hot/cold beverage compartment	■
Power socket, 12 V & 24 V	■
USB port	■
Cup holder	■
Interior light	■
Ambient light	■
Rain shield	●
FOG guard	●
Front window guard	●

## Electrical

System voltage – 24 V	■
Alternator – 24 V, 90 A	■
2 x 12 V batteries, 150 AH reserve capacity, 950 CCA	■
Blade-type fuse panel	■
Main circuit breaker	■
Light, work (LED): machine (2), boom (2)	■
Light, work (LED): 6 cab top, front (4), rear (2)	■
Four-corner beacon light	■
Hour meter	■
Engine restart prevention system	■
Side view & rearview camera with LED lamps	■
Smart AVM	●
HDS (Human Detection System) with around-view camera & radar	●
Emergency Stop (E-Stop)	●
Laptop service port	■
Self-diagnostics system	■
Smart Key with Digital Key app	■
MY DEVELON (telematics)	■
2D Smart Guidance System with laser receiver	■
Virtual walls, weighing system, lift assist	■
Advanced lift assist	●

## Display Monitor & Warnings

Indicators - Power modes - Work modes - User/Service menu	■
Gauges - Fuel level - DEF level - Engine coolant temperature - Hydraulic oil temperature - Engine rpm - Battery voltage - Hydraulic pump pressure - ECO - Digital clock - Trip meter - Hour meter - Fuel consumption	■
Smart Guidance 2D screen - Set assist mode - Set grade precision - Set grade mode - Virtual wall limits - Laser indicator - Vertical distance from target position - Pitch & roll angle indicators - Bucket angle indicator - Bucket tooth depth indicator zones - Slope indicator - Active bucket name - Horizontal distance between bucket tooth & reference point	■
Warning & indicator lights - Seat belt - Error code - SCR warning - Check engine - Engine oil pressure - Engine pre-heat engaged - Radiator coolant level & temperature - Air filter - Fuel level - DEF level – low - Water in fuel - Battery charge - Work lights on - Hydraulic oil temperature - Hydraulic charge pressure - Hydraulic pilot filter - Hydraulic return filter	■
Swing alarm	■
Travel alarm	■
Buzzer - Engine oil pressure - Coolant temperature	■

## Undercarriage

Track guards & chains with adjusters	■
Track rollers, upper	2
Track rollers, lower	9
In-shoe motor protection	■
Shoes, triple grouser – 800 mm	■
Shoes, triple grouser – 900 mm	●

## Other

Centralized lubrication - Boom - Swing	■
Handrails & service platforms	■
Skid-resistant steps & service platforms	■
Manuals - Operation & Maintenance - AEM Safety Manual	■
MY DEVELON 3-year subscription (telematics)	■
Vandalism protection - Lockable panels - Lockable fluid fill points - Anti-theft protection (password) - Window cover mount	■
Basic PHM (Prognostics & Health Management)	■
Premium PHM	●

Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual DEVELON equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors. Pictures of DEVELON units may show other than standard equipment.

# Powered by Innovation

# DEVELON

A brand of HD Construction Equipment.

[na.develon-ce.com/dx260lc-9](http://na.develon-ce.com/dx260lc-9)

DX260LC-9 Crawler Excavator Spec Sheet  
Printed in the U.S.A.  
26906\_001\_D030226

©2026 HD Construction Equipment  
Develon North America. All rights reserved.