

# DEVELON

## Log Loader

# DX225LL-7



### Engine

|                                       |                                     |
|---------------------------------------|-------------------------------------|
| Make                                  | DEVELON                             |
| Model                                 | DL06P                               |
| Number of cylinders                   | 6                                   |
| Rated power, gross (hp per SAE J1995) | 166.7 hp (124.3 kW) @ 1800 rpm      |
| Rated power, net (hp per SAE J1349)   | 162.7 hp (121.4 kW) @ 1800 rpm      |
| Max. torque, gross (SAE J1995)        | 556.9 ft.-lb. (775.0 Nm) @ 1400 rpm |
| Displacement                          | 360.0 in. <sup>3</sup> (5.9 L)      |
| Bore and stroke                       | 3.9" x 4.9" (100 mm x 125 mm)       |
| Starter                               | 24 V, 8.0 hp (6.0 kW)               |
| Battery                               | 2 x 12 V, 150 AH                    |
| Alternator                            | 24 V, 80 A                          |
| Air cleaner                           | Three-stage                         |

### Hydraulics

|                          |                                 |
|--------------------------|---------------------------------|
| Main pumps               | 2 x 56.4 gpm (2 x 213.5 L/min.) |
| Pilot pump (gear design) | 6.5 gpm (24.7 L/min.)           |

### Working Pressure

|                               |                                        |
|-------------------------------|----------------------------------------|
| Boom/arm/bucket (normal mode) | 4978.2 psi (350.0 kg/cm <sup>2</sup> ) |
| Boom/arm/bucket (power boost) | 5262.6 psi (370.0 kg/cm <sup>2</sup> ) |
| Travel                        | 5262.6 psi (370.0 kg/cm <sup>2</sup> ) |
| Swing                         | 4267.0 psi (300.0 kg/cm <sup>2</sup> ) |
| Pilot                         | 568.9 psi (40.0 kg/cm <sup>2</sup> )   |

### Undercarriage

|                                  |                    |
|----------------------------------|--------------------|
| Upper rollers (each track)       | 2                  |
| Lower rollers (each track)       | 9                  |
| Number of shoes (links per side) | 45                 |
| Total length of track            | 15' 2.5" (4635 mm) |

### Swing Mechanism

|              |                                 |
|--------------|---------------------------------|
| Swing speed  | 0 – 10.7 rpm                    |
| Swing torque | 69622.8 lbf.-ft. (9625.7 kgf-m) |

### Drive System

|                                     |                                |
|-------------------------------------|--------------------------------|
| Travel speed [low – high]           | 1.6 – 2.7 mph (2.5 – 4.4 km/h) |
| Traction force, max. (drawbar pull) | 72598.2 lbf. (32930.0 kgf)     |
| Max. grade (limited by engine lub)  | 70% (35°)                      |

### Environment

|                              |           |
|------------------------------|-----------|
| Sound level (2000/14/EC)     | 105 dB(A) |
| Cabin sound level (ISO 6396) | 69 dB(A)  |

### Refill Capacities

|                                    |                      |
|------------------------------------|----------------------|
| Fuel tank                          | 254.4 gal. (963.0 L) |
| DEF tank                           | 7.9 gal. (30.0 L)    |
| Cooling system (radiator capacity) | 9.0 gal. (34.1 L)    |
| Engine oil (with filter)           | 7.1 gal. (27.0 L)    |
| Swing drive                        | 1.3 gal. (5.0 L)     |
| Final drive (each side)            | 1.8 gal. (7.0 L)     |
| Hydraulic system                   | 74.0 gal. (280.0 L)  |
| Hydraulic tank                     | 34.6 gal. (131.0 L)  |

All capacities are approximate values. Always refer to the machine's OM for exact refill levels. Check the dipstick, level eye, level plug, etc., to achieve the correct level.

### Hydraulic Cylinders

|                                       |                                                    |
|---------------------------------------|----------------------------------------------------|
| Boom (2) bore x rod diameter x stroke | 5.5" x 3.7" x 45.0"<br>(140 mm x 95 mm x 1143 mm)  |
| Arm (1) bore x rod diameter x stroke  | 6.5" x 4.5" x 55.0"<br>(165 mm x 115 mm x 1396 mm) |
| Heel (1) bore x rod diameter x stroke | 4.5" x 3.0" x 36.0"<br>(115 mm x 75 mm x 915 mm)   |



The piston rods and cylinder bodies are made of high-strength steel. A shock-absorbing mechanism is fitted in all cylinders to ensure shock-free operation and extended piston life.

NOTE: Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) and ISO standards. Specifications and design are subject to change without notice. All dimensions are given for DEVELON log loaders equipped with standard tracks and the standard front as listed. Pictures of DEVELON log loaders may show other than standard equipment. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. Rounding may impact specifications. DEVELON equipment is manufactured with a Quality Management System that is in compliance with ISO 9001:2008.

# Dimensions


|                            |                | Standard Cab<br>27.6" (700 mm) DG Shoe<br>(US20) | Forestry Cab<br>27.6" (700 mm) DG Shoe<br>(US25) |
|----------------------------|----------------|--------------------------------------------------|--------------------------------------------------|
| Boom length                |                | 20' 2.1" (6150 mm)                               |                                                  |
| Arm length                 |                | 12' 0.1" (3660 mm)                               |                                                  |
| Heel                       |                | 2' 7.9" (810 mm)                                 |                                                  |
| Track type                 |                | High & wide fixed                                |                                                  |
| Tail swing radius          | A <sub>1</sub> | 10' 4.2" (3155 mm)                               |                                                  |
| Tail swing overhang (rear) | A <sub>2</sub> | 2' 9.0" (838 mm)                                 |                                                  |
| Tail swing overhang (side) | A <sub>3</sub> | 4' 5.3" (1355 mm)                                |                                                  |
| Shipping height            | B              | 11' 7.0" (3530 mm)                               |                                                  |
| Shipping length            | C              | 45' 5.3" (13850 mm)                              |                                                  |
| Shipping width             | D              | 11' 9.7" (3600 mm)                               |                                                  |
| Counterweight clearance*   | E              | 4' 1.6" (1260 mm)                                |                                                  |
| Cabin height               | F              | 15' 1.9" (4620 mm)                               | 15' 7.8" (4770 mm)                               |
| Cab riser                  |                | 3' 11.2" (1200 mm)                               |                                                  |
| Upper structure width      | G              | 10' 10.9" (3325 mm)                              |                                                  |
| Cabin width                | H              | 3' 3.8" (1010 mm)                                | 3' 8.9" (1140 mm)                                |
| Cabin guarding width       |                | 3' 7.5" (1105 mm)                                | Std on forestry cab structure                    |
| Tumbler distance           | I              | 12' 0.9" (3680 mm)                               |                                                  |
| Overall track length       | J              | 15' 2.4" (4635 mm)                               |                                                  |
| Undercarriage width        | K              | 11' 9.7" (3600 mm)                               |                                                  |
| Track gauge width          | L              | 9' 6.2" (2900 mm)                                |                                                  |
| Track shoe width           | M              | 27.6" (700 mm)                                   |                                                  |
| Track height*              | N              | 3' 7.5" (1105 mm)                                |                                                  |
| Car body clearance*        | O              | 2' 2.6" (674.5 mm)                               |                                                  |
| Cabin tilting angle        |                | 90°                                              |                                                  |

\*Without shoe grouser

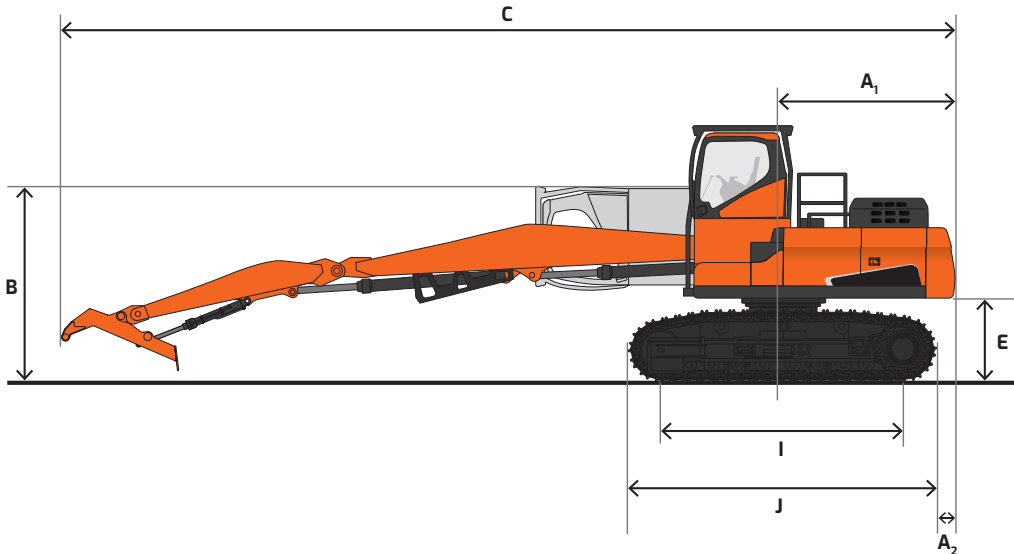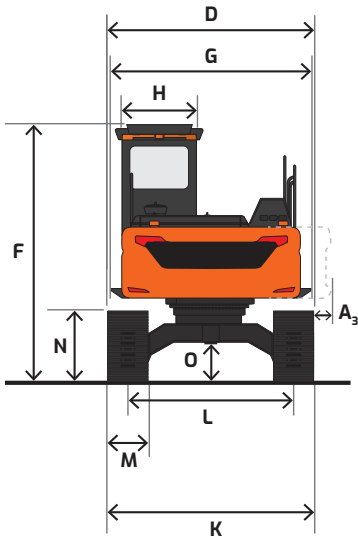



# Working Range

|                             |   | Standard Cab<br>27.6" (700 mm) DG Shoe<br>(US20) | Forestry Cab<br>27.6" (700 mm) DG Shoe<br>(US25) |
|-----------------------------|---|--------------------------------------------------|--------------------------------------------------|
| Boom length                 |   | 20' 2.1" (6150 mm)                               |                                                  |
| Arm length                  |   | 12' 0.1" (3660 mm)                               |                                                  |
| Counterweight               |   | 9700 lb. (4400 kg)                               |                                                  |
| Track type                  |   | High & wide fixed                                |                                                  |
| Max. working reach          | A | 36' 0.9" (10995 mm)                              |                                                  |
| Max. working reach (ground) | B | 35' 5.0" (10795 mm)                              |                                                  |
| Max. working depth          | C | 11' 3.6" (3445 mm)                               |                                                  |
| Max. working height         | D | 42' 3.3" (12885 mm)                              |                                                  |
| Max. level log height       | E | 29' 3.0" (8915 mm)                               |                                                  |
| Min. swing radius           | F | 12' 1.7" (3700 mm)                               |                                                  |
| Operating weight            |   | 68784 lb. (31200 kg)                             | 70768 lb. (32100 kg)                             |
| Ground pressure             |   | 8.0 psi (0.56 kg/cm <sup>2</sup> )               | 8.0 psi (0.56 kg/cm <sup>2</sup> )               |

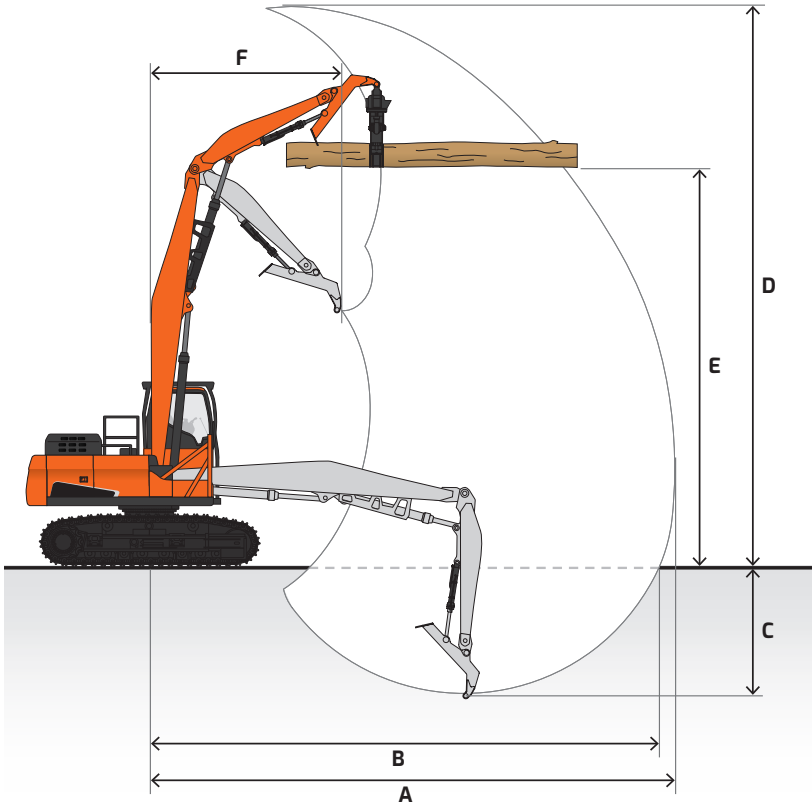

# Grapple

| TC52     |   |                                           |
|----------|---|-------------------------------------------|
| Weight   |   | 2350 lb. (1066 kg)                        |
| Height   | A | 6' 0" (1829 mm)                           |
| Width    | B | 1' 2" (356 mm)                            |
| Open     | C | 4' 5" (1346 mm)                           |
| Closed   | D | 4.5" (114 mm)                             |
| Rotation |   | 15 rpm @ 4 – 6 gal./min. (15 – 23 L/min.) |

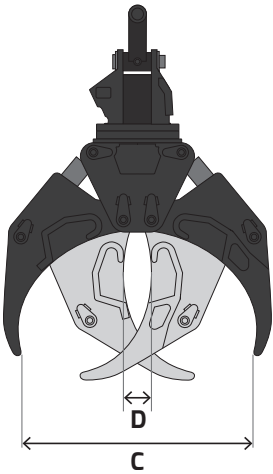

# Lifting Capacity

 Rating over front       Rating over side or 360°


## DX225LL-7 Log Loader US20 | Non-ROPS Cab

Boom: 20' 2.1" (6150 mm) | Arm: 12' 0.1" (3660 mm) | Counterweight: 9700 lb. (4400 kg) | 27.6" (700 mm) DG Shoes | Heel: None | Unit: lb. (kg)

| <div><div>A</div><div>B</div></div> <div>(ft. or m)</div> | 15' (4.5 m)                                                                       |                                                                                   | 20' (6.0 m)                                                                       |                                                                                   | 25' (7.5 m)                                                                       |                                                                                   | 30' (9.0 m)                                                                       |                                                                                   | Max. Reach                                                                        |                                                                                     | A                  |
|-----------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------|
|                                                           |  |  |  |  |  |  |  |  |  |  |                    |
| 35' (10.5 m)                                              | * 25420<br>(* 11530)                                                              | * 25420<br>(* 11530)                                                              |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   | * 22710<br>(* 10300)                                                              | * 22710<br>(* 10300)                                                                | 16.54'<br>(5.04 m) |
| 30' (9.0 m)                                               | * 23050<br>(* 10450)                                                              | * 23050<br>(* 10450)                                                              | * 19950<br>(* 9050)                                                               | * 19950<br>(* 9050)                                                               |                                                                                   |                                                                                   |                                                                                   |                                                                                   | * 17380<br>(* 7880)                                                               | 16390<br>(7430)                                                                     | 22.95'<br>(7.00 m) |
| 25' (7.5 m)                                               | * 22970<br>(* 10420)                                                              | * 22970<br>(* 10420)                                                              | * 19580<br>(* 8880)                                                               | * 19580<br>(* 8880)                                                               | * 17260<br>(* 7830)                                                               | 15050<br>(6830)                                                                   |                                                                                   |                                                                                   | * 15230<br>(* 6910)                                                               | 12770<br>(5790)                                                                     | 26.99'<br>(8.23 m) |
| 20' (6.0 m)                                               | * 24520<br>(* 11120)                                                              | * 24520<br>(* 11120)                                                              | * 20220<br>(* 9170)                                                               | * 20220<br>(* 9170)                                                               | * 17330<br>(* 7860)                                                               | 15030<br>(6820)                                                                   | 13780<br>(6250)                                                                   | 11120<br>(5050)                                                                   | 13630<br>(6180)                                                                   | 11000<br>(4990)                                                                     | 29.70'<br>(9.05 m) |
| 15' (4.5 m)                                               | * 27390<br>(* 12430)                                                              | * 27390<br>(* 12430)                                                              | * 21460<br>(* 9730)                                                               | 20740<br>(9410)                                                                   | * 17770<br>(* 8060)                                                               | 14770<br>(6700)                                                                   | 13800<br>(6260)                                                                   | 11150<br>(5060)                                                                   | 12490<br>(5660)                                                                   | 10060<br>(4570)                                                                     | 31.39'<br>(9.57 m) |
| 10' (3.0 m)                                               |                                                                                   |                                                                                   | * 22690<br>(* 10290)                                                              | 19970<br>(9060)                                                                   | 17930<br>(8130)                                                                   | 14400<br>(6530)                                                                   | 13660<br>(6200)                                                                   | 11010<br>(5000)                                                                   | 11950<br>(5420)                                                                   | 9620<br>(4370)                                                                      | 32.25'<br>(9.83 m) |
| 5' (1.5 m)                                                |                                                                                   |                                                                                   | * 23100<br>(* 10480)                                                              | 19270<br>(8740)                                                                   | 17560<br>(7960)                                                                   | 14050<br>(6370)                                                                   | 13510<br>(6130)                                                                   | 10860<br>(4930)                                                                   | * 11090<br>(* 5030)                                                               | 9560<br>(4330)                                                                      | 32.33'<br>(9.85 m) |
| Ground Level                                              | * 24930<br>(* 11310)                                                              | * 24930<br>(* 11310)                                                              | * 21990<br>(* 9970)                                                               | 18810<br>(8530)                                                                   | * 16990<br>(* 7710)                                                               | 13800<br>(6260)                                                                   | * 12660<br>(* 5740)                                                               | 10770<br>(4890)                                                                   | * 9850<br>(* 4470)                                                                | * 9850<br>(* 4470)                                                                  | 31.54'<br>(9.61 m) |
| -5' (-1.5 m)                                              | * 24100<br>(* 10930)                                                              | * 24100<br>(* 10930)                                                              | * 18970<br>(* 8610)                                                               | 18650<br>(8460)                                                                   | * 14440<br>(* 6550)                                                               | 13720<br>(6220)                                                                   |                                                                                   |                                                                                   | * 11320<br>(* 5140)                                                               | * 11320<br>(* 5140)                                                                 | 27.83'<br>(8.48 m) |

A Distance from center of rotation  
B Height

NOTE: Lifting capacities are in compliance with SAE 1097 and ISO 10567. Machine in lifting mode with power boost turned on. Load point is the end of the arm. Rated loads shown do not exceed 75% of minimum tipping loads or 87% of hydraulic capacities. Rated loads marked with an asterisk (\*) are limited by hydraulic capacities. The least stable position is over the side. The total mass of machine includes the mass of the boom, arm, counterweight, all operating fluids and 165 lb. (75 kg) operator.

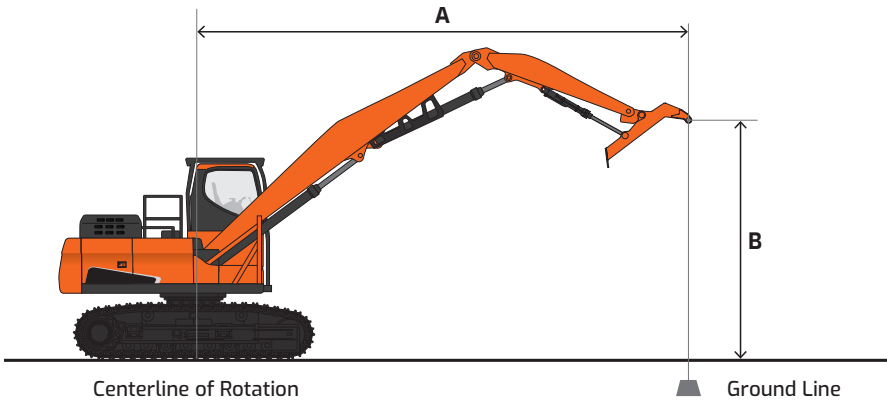

# Lifting Capacity

 Rating over front       Rating over side or 360°


## DX225LL-7 Log Loader US25 | Forestry Cab

Boom: 20' 2.1" (6150 mm) | Arm: 12' 0.1" (3660 mm) | Counterweight: 9700 lb. (4400 kg) | 27.6" (700 mm) DG Shoes | Heel: None | Unit: lb. (kg)

| A<br>B<br>(ft. or m) | 15' (4.5 m)                                                                       |                                                                                   | 20' (6.0 m)                                                                       |                                                                                   | 25' (7.5 m)                                                                       |                                                                                   | 30' (9.0 m)                                                                       |                                                                                   | Max. Reach                                                                         |                                                                                     | A               |
|----------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------------|
|                      |  |  |  |  |  |  |  |  |  |  |                 |
| 35' (10.5 m)         | * 25420 (* 11530)                                                                 | * 25420 (* 11530)                                                                 |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   | * 22710 (* 10300)                                                                  | * 22710 (* 10300)                                                                   | 16.54' (5.04 m) |
| 30' (9.0 m)          | * 23050 (* 10450)                                                                 | * 23050 (* 10450)                                                                 | * 19950 (* 9050)                                                                  | * 19950 (* 9050)                                                                  |                                                                                   |                                                                                   |                                                                                   |                                                                                   | * 17380 (* 7880)                                                                   | 16670 (7560)                                                                        | 22.95' (7.00 m) |
| 25' (7.5 m)          | * 22970 (* 10420)                                                                 | * 22970 (* 10420)                                                                 | * 19580 (* 8880)                                                                  | * 19580 (* 8880)                                                                  | * 17260 (* 7830)                                                                  | 15310 (6950)                                                                      |                                                                                   |                                                                                   | * 15230 (* 6910)                                                                   | 13000 (5900)                                                                        | 26.99' (8.23 m) |
| 20' (6.0 m)          | * 24520 (* 11120)                                                                 | * 24520 (* 11120)                                                                 | * 20220 (* 9170)                                                                  | * 20220 (* 9170)                                                                  | * 17330 (* 7860)                                                                  | 15290 (6930)                                                                      | 14060 (6380)                                                                      | 11330 (5140)                                                                      | 13900 (6310)                                                                       | 11200 (5080)                                                                        | 29.70' (9.05 m) |
| 15' (4.5 m)          | * 27390 (* 12430)                                                                 | * 27390 (* 12430)                                                                 | * 21460 (* 9730)                                                                  | 21090 (9570)                                                                      | * 17770 (* 8060)                                                                  | 15030 (6820)                                                                      | 14080 (6390)                                                                      | 11360 (5150)                                                                      | 12740 (5780)                                                                       | 10260 (4650)                                                                        | 31.39' (9.57 m) |
| 10' (3.0 m)          |                                                                                   |                                                                                   | * 22690 (* 10290)                                                                 | 20320 (9220)                                                                      | * 18160 (* 8240)                                                                  | 14660 (6650)                                                                      | 13940 (6320)                                                                      | 11220 (5090)                                                                      | 12200 (5530)                                                                       | 9810 (4450)                                                                         | 32.25' (9.83 m) |
| 5' (1.5 m)           |                                                                                   |                                                                                   | * 23100 (* 10480)                                                                 | 19620 (8900)                                                                      | 17900 (8120)                                                                      | 14310 (6490)                                                                      | 13780 (6250)                                                                      | 11070 (5020)                                                                      | * 11090 (* 5030)                                                                   | 9740 (4420)                                                                         | 32.33' (9.85 m) |
| Ground Level         | * 24930 (* 11310)                                                                 | * 24930 (* 11310)                                                                 | * 21990 (* 9970)                                                                  | 19160 (8690)                                                                      | * 16990 (* 7710)                                                                  | 14060 (6380)                                                                      | * 12660 (* 5740)                                                                  | 10980 (4980)                                                                      | * 9850 (* 4470)                                                                    | * 9850 (* 4470)                                                                     | 31.54' (9.61 m) |
| -5' (-1.5 m)         | * 24100 (* 10930)                                                                 | * 24100 (* 10930)                                                                 | * 18970 (* 8610)                                                                  | * 18970 (* 8610)                                                                  | * 14440 (* 6550)                                                                  | 13980 (6340)                                                                      |                                                                                   |                                                                                   | * 11320 (* 5140)                                                                   | * 11320 (* 5140)                                                                    | 27.83' (8.48 m) |

A Distance from center of rotation  
B Height

NOTE: Lifting capacities are in compliance with SAE 1097 and ISO 10567. Machine in lifting mode with power boost turned on. Load point is the end of the arm. Rated loads shown do not exceed 75% of minimum tipping loads or 87% of hydraulic capacities. Rated loads marked with an asterisk (\*) are limited by hydraulic capacities. The least stable position is over the side. The total mass of machine includes the mass of the boom, arm, counterweight, all operating fluids and 165 lb. (75 kg) operator.

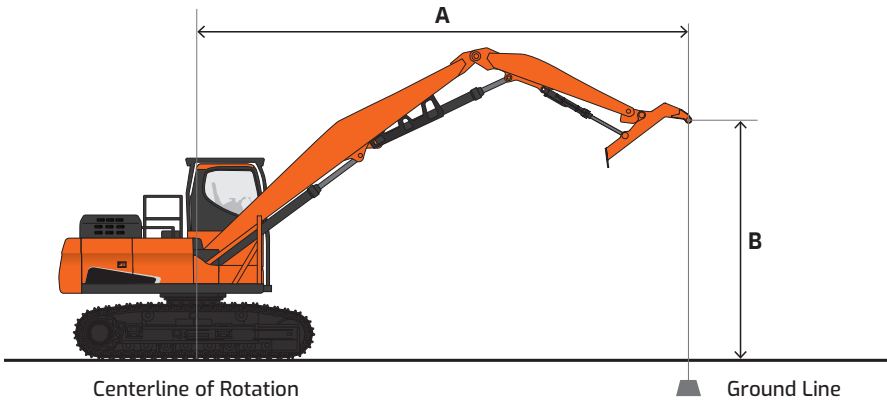

# Standard & Optional Equipment

■ Standard      ● Optional

## Engine

|                                                 |   |
|-------------------------------------------------|---|
| Emissions (EPA), T4f                            | ■ |
| High-pressure common-rail (HPCR)                | ■ |
| Turbo, variable geometry (VGT)                  | ■ |
| Cooled exhaust gas recirculation (CEGR)         | ■ |
| Diesel oxidation catalyst (DOC)                 | ■ |
| Exhaust brake                                   | ■ |
| Selective catalytic reduction (SCR)             | ■ |
| Diesel exhaust fluid (DEF)                      | ■ |
| Fuel filter with water separator                | ■ |
| Coolant expansion tank                          | ■ |
| Dual element dry-type air filter with evacuator | ■ |
| Precleaner                                      | ■ |
| Electronic engine control (ECU)                 | ■ |
| Auto idle                                       | ■ |
| Auto shutdown (time-adjustable)                 | ■ |
| Overheat & low oil pressure engine protection   | ■ |
| Block heater (110 V)                            | ■ |
| Water separator with heater                     | ■ |

## Hydraulic

|                                            |   |
|--------------------------------------------|---|
| Mechatronics Design                        | ■ |
| Variable axial piston main pump (tandem)   | ■ |
| Cross-sensing pump control                 | ■ |
| Pilot-operated control valves              | ■ |
| Gear pilot pump                            | ■ |
| D-ECOPOWER™ system                         | ■ |
| Variable-speed hydraulic cooling fan       | ■ |
| Axial piston swing motor                   | ■ |
| Spring-applied hydraulic release brake     | ■ |
| Axial piston travel motor (high/low, auto) | ■ |
| Auxiliary hydraulics, two-way piping       | ■ |
| Auxiliary hydraulics, rotate piping        | ■ |
| Straight travel                            | ■ |

## Controls

|                                                                                                                                                                                           |   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| Joystick controls                                                                                                                                                                         | ■ |
| Pattern control change valve (SAE, ISO)                                                                                                                                                   | ■ |
| Joystick attachment control, switches/buttons <ul style="list-style-type: none"><li>- Right (one-way, two-way, power boost)</li><li>- Left (tilt/rotate, horn, one-touch decel)</li></ul> | ■ |
| Foot pedal attachment control                                                                                                                                                             | ■ |
| Control stands <ul style="list-style-type: none"><li>- Height adjustable</li><li>- Sliding (fore/aft)</li><li>- Tilting armrests</li></ul>                                                | ■ |
| Engine speed control dial                                                                                                                                                                 | ■ |
| Travel pedals with hand levers                                                                                                                                                            | ■ |
| Straight travel pedal                                                                                                                                                                     | ■ |
| Switches, console-mounted <ul style="list-style-type: none"><li>- Starter button switch</li><li>- Travel speed selector</li><li>- Work light</li><li>- Auxiliary mode switch</li></ul>    | ■ |
| Emergency stop switch                                                                                                                                                                     | ■ |
| Power modes (P+, P, S, E)                                                                                                                                                                 | ■ |
| Jog dial display control                                                                                                                                                                  | ■ |
| Wiper control panel                                                                                                                                                                       | ■ |
| Audio control panel                                                                                                                                                                       | ■ |

## Cabin

|                                                                                                                                                                                                                                                        |   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| Steel, all-weather & sound-suppressed                                                                                                                                                                                                                  | ■ |
| Cab riser                                                                                                                                                                                                                                              | ■ |
| Forestry cab, side entry                                                                                                                                                                                                                               | ● |
| 32 mm polycarbonate glass                                                                                                                                                                                                                              | ● |
| Cab guard – front, top & rear                                                                                                                                                                                                                          | ■ |
| Viscous mount with spring reinforcement                                                                                                                                                                                                                | ■ |
| Front window with wiper/washer                                                                                                                                                                                                                         | ■ |
| Tinted safety glass                                                                                                                                                                                                                                    | ■ |
| Skylight top hatch with sun screen                                                                                                                                                                                                                     | ■ |
| Front window with sun screen                                                                                                                                                                                                                           | ■ |
| Wiper, lower window                                                                                                                                                                                                                                    | ■ |
| Adjustable sliding side door window                                                                                                                                                                                                                    | ■ |
| Defrost, front window                                                                                                                                                                                                                                  | ■ |
| Lockable doors                                                                                                                                                                                                                                         | ■ |
| Leatherette seat <ul style="list-style-type: none"><li>- Heating &amp; cooling</li><li>- Air-suspension</li><li>- 2" (51 mm) seat belt</li><li>- Adjustable height &amp; recline</li><li>- Adjustable fore/aft</li><li>- Adjustable armrests</li></ul> | ■ |
| Control stands <ul style="list-style-type: none"><li>- Height adjustable</li><li>- Mounted to seat base</li></ul>                                                                                                                                      | ■ |
| Storage for operator's manuals                                                                                                                                                                                                                         | ■ |
| Mirrors                                                                                                                                                                                                                                                | ■ |
| Fully automatic HVAC with ambient temperature sensor                                                                                                                                                                                                   | ■ |
| 8" multi-function LCD interactive display monitor                                                                                                                                                                                                      | ■ |
| Digital Bluetooth® & MP3 radio with cell phone integration                                                                                                                                                                                             | ■ |
| Speakers (2)                                                                                                                                                                                                                                           | ■ |
| Antenna, roof-mounted                                                                                                                                                                                                                                  | ■ |
| Hot/cold beverage compartment                                                                                                                                                                                                                          | ■ |
| Power sockets, 12 V & 24 V                                                                                                                                                                                                                             | ■ |
| Cup holder                                                                                                                                                                                                                                             | ■ |
| Interior light                                                                                                                                                                                                                                         | ■ |

## Electrical

|                                             |   |
|---------------------------------------------|---|
| System voltage – 24 V                       | ■ |
| Alternator – 24 V, 80 A                     | ■ |
| 2 x 12 V batteries, 150 AH reserve capacity | ■ |
| Blade-type fuse panel                       | ■ |
| Main circuit breaker                        | ■ |
| Lights, work (LED): machine (8), boom (2)   | ■ |
| Hour meter                                  | ■ |
| Engine restart prevention system            | ■ |
| Rearview camera                             | ■ |
| Side view camera                            | ■ |
| Microphone & speaker                        | ■ |
| Laptop service port                         | ■ |
| Self-diagnostics system                     | ■ |
| MY DEVELON (telematics)                     | ■ |

## Display Monitor & Warnings

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |   |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| Gauges <ul style="list-style-type: none"><li>- Fuel level</li><li>- DEF level</li><li>- Engine coolant temperature</li><li>- Hydraulic oil temperature</li><li>- Engine rpm</li><li>- Battery voltage</li><li>- Hydraulic pump pressure</li><li>- ECO</li><li>- Digital clock</li><li>- Trip meter</li><li>- Hour meter</li><li>- Fuel consumption</li></ul>                                                                                                                                                                                                         | ■ |
| Warning & indicator lights <ul style="list-style-type: none"><li>- Seat belt</li><li>- Error code</li><li>- SCR warning</li><li>- Check engine</li><li>- Engine oil pressure</li><li>- Engine pre-heat engaged</li><li>- Radiator coolant level &amp; temperature</li><li>- Air filter</li><li>- Fuel level</li><li>- DEF level – low</li><li>- Water in fuel</li><li>- Battery charge</li><li>- Work lights on</li><li>- Hydraulic oil temperature</li><li>- Hydraulic charge pressure</li><li>- Hydraulic pilot filter</li><li>- Hydraulic return filter</li></ul> | ■ |
| Travel alarm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | ■ |
| Buzzer <ul style="list-style-type: none"><li>- Engine oil pressure</li><li>- Coolant temperature</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                           | ■ |

## Undercarriage

|                                      |   |
|--------------------------------------|---|
| High-walker, high & wide fixed width | ■ |
| Track guards & chains with adjusters | ■ |
| Track rollers, upper                 | 2 |
| Track rollers, lower                 | 9 |
| In-shoe motor protection             | ■ |
| Shoes, double grouser – 700 mm       | ■ |
| Link, HD chain                       | ■ |
| Track guides, HD full-length         | ■ |

## Main Frame

|                                                      |   |
|------------------------------------------------------|---|
| HD mainframe reinforcement                           | ■ |
| HD integrated catwalks                               | ■ |
| HD guarding, underbody plating                       | ■ |
| HD guarding, final drive motors                      | ■ |
| HD guarding, side doors – pump & radiator protection | ■ |

## Other

|                                                                                                                                                                        |   |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|
| Centralized lubrication <ul style="list-style-type: none"><li>- Boom</li><li>- Swing</li></ul>                                                                         | ■ |
| Reversing fan                                                                                                                                                          | ■ |
| Handrails & service platforms                                                                                                                                          | ■ |
| Skid-resistant steps & service platforms                                                                                                                               | ■ |
| Manuals <ul style="list-style-type: none"><li>- Operation &amp; Maintenance</li><li>- AEM Safety Manual</li></ul>                                                      | ■ |
| MY DEVELON 3-year subscription (telematics)                                                                                                                            | ■ |
| Vandalism protection <ul style="list-style-type: none"><li>- Lockable panels</li><li>- Lockable fluid fill points</li><li>- Anti-theft protection (password)</li></ul> | ■ |
| Ground saw ready                                                                                                                                                       | ● |

Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual DEVELON equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors. Pictures of DEVELON units may show other than standard equipment.

# Powered by Innovation

# DEVELON

A brand of HD Hyundai Infracore.

[na.develon-ce.com/dx225ll-7](http://na.develon-ce.com/dx225ll-7)

DX225LL-7 Log Loader Spec Sheet  
Printed in the U.S.A.  
25903\_002\_D092925

©2025 HD Hyundai Infracore. All rights reserved.