

DEVELON

Crawler Excavator

DX420LC-7



Engine

Make	Scania
Model	DC13
Number of cylinders	6
Rated power, gross (hp per SAE J1995)	344.6 hp (257.0 kW) @ 1800 rpm
Rated power, net (hp per SAE J1349)	344.6 hp (257.0 kW) @ 1800 rpm
Max. torque, gross (SAE J1995)	1178.9 ft.-lb. (1598.0 Nm) @ 800-1500 rpm
Displacement	755.0 in. ³ (12.7 L)
Bore and stroke	5.1" x 6.3" (130 mm x 160 mm)
Starter	24 V, 8.0 hp (6.0 kW)
Battery	2 x 12 V, 200 AH
Alternator	28 V, 100 A
Air cleaner	Three-stage

Hydraulics

Main pumps	2 x 95.1 gpm (2 x 360.0 L/min.)
Pilot pump (gear design)	6.3 gpm (24.0 L/min.)

Working Pressure

Boom/arm/bucket (normal mode)	4980.0 psi (350.0 kg/cm ²)
Boom/arm/bucket (power boost)	4980.0 psi (350.0 kg/cm ²)
Travel	4694.0 psi (330.0 kg/cm ²)
Swing	3980.0 psi (280.0 kg/cm ²)
Pilot	586.0 psi (40.8 kg/cm ²)

Undercarriage

Upper rollers (each track)	2
Lower rollers (each track)	9
Number of shoes (links per side)	50

Swing Mechanism

Swing speed	0 - 9.6 rpm
Swing torque	118332.0 lbf.-ft. (16360.0 kgf-m)

Drive System

Travel speed (low - high)	2.1 - 3.4 mph (3.3 - 5.4 km/h)
Traction force, max. (drawbar pull)	95767.8 lbf. (43440.0 kgf)
Max. grade (limited by engine lub)	70% (35°)

Environment

Sound level (2000/14/EC)	104 dB(A)
Cabin sound level (ISO 6396)	71 dB(A)

Refill Capacities

Fuel tank	161.4 gal. (611.0 L)
DEF tank	16.6 gal. (63.0 L)
Cooling system (radiator capacity)	13.9 gal. (53.5 L)
Engine oil (with filter)	11.9 gal. (45.0 L)
Swing drive	2.1 gal. (8.0 L)
Final drive (each side)	1.8 gal. (7.0 L)
Hydraulic system	145.3 gal. (550.0 L)
Hydraulic tank	70.0 gal. (265.0 L)

All capacities are approximate values. Always refer to the machine's OM for exact refill levels. Check the dipstick, level eye, level plug, etc., to achieve the correct level.

Hydraulic Cylinders

Boom ¹ (2) bore x rod diameter x stroke	6.7" x 4.5" x 58.5" (170 mm x 115 mm x 1485 mm)
Arm ^{1,2} (1) bore x rod diameter x stroke	7.1" x 4.7" x 71.7" (180 mm x 120 mm x 1820 mm)
Bucket ¹ (1) bore x rod diameter x stroke	6.3" x 4.3" x 52.0" (160 mm x 110 mm x 1320 mm)

¹ Cushion on rod end

² Cushion on base end


The piston rods and cylinder bodies are made of high-strength steel. A shock-absorbing mechanism is fitted in all cylinders to ensure shock-free operation and extended piston life.

NOTE: Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) and ISO standards. Specifications and design are subject to change without notice. All dimensions are given for DEVELON excavators equipped with standard tracks and the standard front as listed. Pictures of DEVELON excavators may show other than standard equipment. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. Rounding may impact specifications. DEVELON equipment is manufactured with a Quality Management System that is in compliance with ISO 9001:2008.

Dimensions

		Standard Arm 31.5" (800 mm) TG Shoe (US15)	Standard Arm 35.4" (900 mm) TG Shoe (US20)	Long Arm 35.4" (900 mm) TG Shoe (US30)
Boom length		22' 0.0" (6700 mm)	21' 11.8" (6700 mm)	
Arm length		10' 8.0" (3250 mm)		12' 11.5" (3950 mm)
Bucket size (SAE)		2.51 yd ³ (1.92 m ³)		2.15 yd ³ (1.64 m ³)
Tail swing radius	A	12' 4.0" (3760 mm)		
Shipping height (boom)	B	11' 0.1" (3355 mm)		11' 1.5" (3390 mm)
Shipping height (hose)	C	11' 4.5" (3466 mm)		11' 5.6" (3495 mm)
Shipping length	D	38' 6.2" (11740 mm)		
Shipping width	E	11' 11.7" (3550 mm)		
Counterweight clearance*	F	4' 2.0" (1270 mm)		
Cabin height	G	10' 6.4" (3210 mm)		
Upper structure width	H	9' 9.7" (2990 mm)		
Cabin height above house	I	2' 9.7" (855 mm)		
Cabin width	J	3' 3.8" (1010 mm)		
Tumbler distance	K	13' 11.3" (4250 mm)		
Overall track length	L	17' 1.0" (5205 mm)		
Undercarriage width	M	11' 8.0" (3550 mm)	11' 11.7" (3650 mm)	
Track shoe width	N	31.5" (800 mm)	35.4" (900 mm)	
Track height*	O	3' 6.1" (1070 mm)		
Car body clearance*	P	1' 11.0" (583 mm)		


*Without shoe grouser

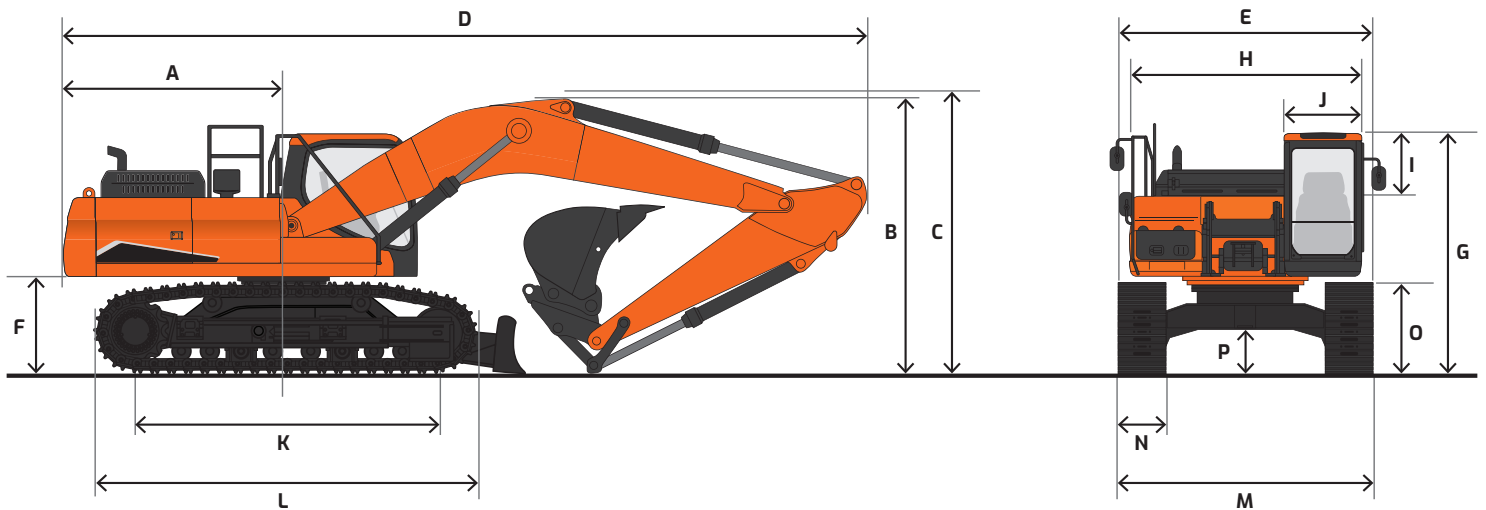

Working Range

		Standard Arm 31.5" (800 mm) TG Shoe (US15)	Standard Arm 35.4" (900 mm) TG Shoe (US20)	Long Arm 35.4" (900 mm) TG Shoe (US30)
Boom length		22' 0.0" (6700 mm)	21' 11.8" (6700 mm)	
Arm length		10' 8.0" (3250 mm)		12' 11.5" (3950 mm)
Bucket size (SAE)		2.51 yd ³ (1.92 m ³)		2.15 yd ³ (1.64 m ³)
Counterweight		17920 lb. (8000 kg)	21605 lb. (9800 kg)	
Track type		Fixed		
Max. digging reach	A	37' 6.0" (11430 mm)		39' 9.2" (12120 mm)
Max. digging reach (ground)	B	36' 9.3" (11210 mm)		39' 0.9" (11910 mm)
Max. digging depth	C	25' 0.6" (7635 mm)		27' 4.1" (8335 mm)
Max. loading height	D	25' 7.5" (7810 mm)		26' 10.8" (8200 mm)
Min. loading height	E	10' 1.9" (3095 mm)		7' 10.3" (2395 mm)
Max. digging height	F	34' 9.9" (10615 mm)		36' 2.8" (11045 mm)
Max. bucket pin height	G	31' 1.4" (9485 mm)		32' 4.8" (9875 mm)
Max. vertical wall depth	H	10' 1.1" (3075 mm)		12' 6.2" (3815 mm)
Max. radius vertical	I	33' 1.8" (10105 mm)		34' 4.4" (10475 mm)
Max. depth to 8' line	J	24' 5.5" (7455 mm)		26' 10.2" (8185 mm)
Min. radius to 8' line	K	11' 2.4" (3415 mm)		11' 4.4" (3465 mm)
Min. digging reach	L	2' 7.5" (800 mm)		-8.1" (-205 mm)
Min. swing radius	M	14' 8.2" (4475 mm)		14' 11.3" (4555 mm)
Bucket angle (DEG)	d	177°		
Digging force, bucket*	ISO	64374.3 lbf. (29200 kgf)		65035.7 lbf. (29500 kgf)
Digging force, arm*		46737.5 lbf. (21200 kgf)		39903.3 lbf. (18100 kgf)
Operating weight		94527 lb. (42877 kg)	103395 lb. (46900 kg)	103836 lb. (47100 kg)
Ground pressure		8.2 psi (0.58 kg/cm ²)	8.1 psi (0.57 kg/cm ²)	

*With power boost ON

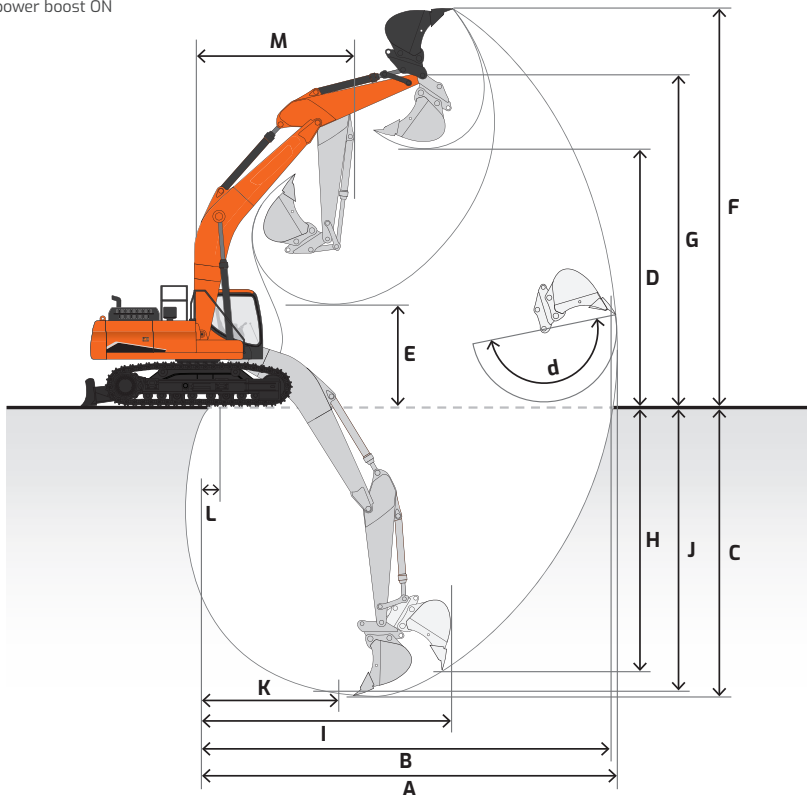

Lifting Capacity

Rating over front Rating over side or 360°


DX420LC-7 US15

Boom: 22' 0.0" (6700 mm) | Arm: 10' 8.0" (3250 mm) | Counterweight: 17920 lb. (8000 kg) | 31.5" (900 mm) Shoes | Bucket: None | Unit: lb. (kg)

	A 10' (3.0 m)	15' (4.5 m)	20' (6.0 m)	25' (7.5 m)	30' (9.0 m)	35' (10.5 m)	40' (12.0 m)	45' (13.5 m)	Max. Reach	A
45' (13.5 m)									* 2100 * 7270	2100 (700 m)
40' (12.0 m)						* 22910 * 7900			* 20010 * 6900	20010 (787 m)
35' (10.5 m)						* 23250 * 8020	* 19660 * 8910		* 20160 * 9130	17690 (849 m)
30' (9.0 m)						* 24380 * 11040	* 19460 * 8820		* 19960 * 9040	15930 (899 m)
25' (7.5 m)						* 26070 * 11810	* 19110 * 10670		* 20050 * 9070	14760 (935 m)
20' (6.0 m)						* 28090 * 12820	* 18680 * 8460		* 20410 * 9250	13960 (960 m)
15' (4.5 m)						* 30200 * 13680	* 15250 * 8250		* 20680 * 9370	13470 (973 m)
10' (3.0 m)						* 32120 * 14550	* 17780 * 8050		* 20400 * 9240	13240 (976 m)
5' (1.5 m)						* 33230 * 15050	* 17410 * 7890		* 20480 * 9280	13240 (968 m)
Ground Level						* 32800 * 14860	* 17390 * 7760		* 20940 * 6990	13510 (950 m)
-5' (-1.5 m)						* 41080 * 18610	* 16980 * 7690		* 21860 * 9900	14060 (920 m)
-10' (-3.0 m)						* 40250 * 18230	* 16960 * 7680		* 23420 * 10610	15030 (878 m)
-15' (-4.5 m)						* 45610 * 20660	* 17370 * 9260		* 25900 * 11730	16570 (822 m)
-20' (-6.0 m)						* 49570 * 22460	* 18780 * 11650		* 26060 * 11810	19140 (747 m)
-25' (-7.5 m)						* 49890 * 22600	* 18830 * 1950		* 25510 * 11550	23780 (648 m)

A Distance from center of rotation
B Height

NOTE: Lifting capacities are in compliance with SAE 1097 and ISO 10567. Machine in lifting mode with power boost turned on. Load point is the end of the arm. Rated loads shown do not exceed 75% of minimum tipping loads or 87% of hydraulic capacities. Rated loads marked with an asterisk (*) are limited by hydraulic capacities. The least stable position is over the side. The total mass of machine includes the mass of the boom, arm, counterweight, all operating fluids and 165 lb. (75 kg) operator.

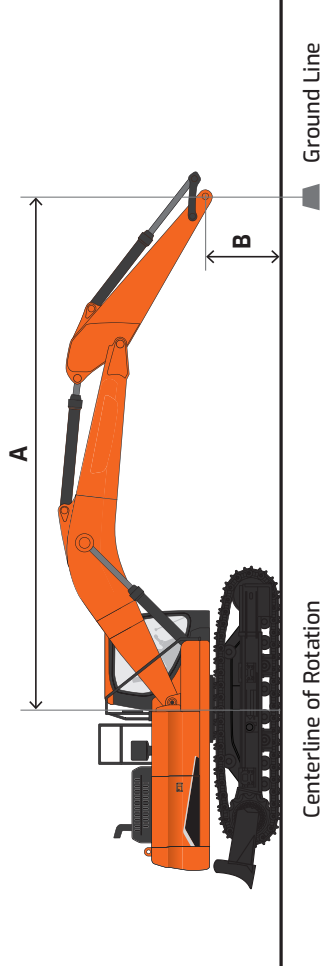

Centerline of Rotation















Ground Line

Lifting Capacity

 Rating over front  Rating over side or 360°


DX420LC-7 US20

Boom: 21' 11.8" (6700 mm) | Arm: 10' 8.0" (3250 mm) | Counterweight: 21605 lb. (9800 kg) | 35.4" (900 mm) Shoes | Bucket: None | Unit: lb. (kg)

A (ft. or m) B (ft. or m)	5' (1.5 m)		10' (3.0 m)		15' (4.5 m)		20' (6.0 m)		25' (7.5 m)		30' (9.0 m)		Max. Reach		
															A
30' (9.0 m)													* 21100 (* 9570)	* 21100 (* 9570)	22.99' (6.92 m)
25' (7.5 m)									* 22920 (* 10400)	* 22920 (* 10400)			* 20400 (* 9250)	* 20400 (* 9250)	26.85' (8.15 m)
20' (6.0 m)									* 23830 (* 10810)	* 23830 (* 10810)			* 19960 (* 9050)	17960 (8150)	29.51' (8.97 m)
15' (4.5 m)					* 38580 (* 17500)	* 38580 (* 17500)	* 30140 (* 13670)	* 30140 (* 13670)	* 25920 (* 11760)	23420 (10620)	* 23670 (* 10740)	17690 (8020)	* 20200 (* 9160)	16210 (7350)	31.14' (9.48 m)
10' (3.0 m)					* 48680 (* 22080)	47070 (21350)	* 34960 (* 15860)	31060 (14090)	* 28470 (* 12910)	22560 (10230)	* 24840 (* 11270)	17270 (7830)	* 21030 (* 9540)	15310 (6950)	31.94' (9.73 m)
5' (1.5 m)					* 43990 (* 19960)	* 43990 (* 19960)	* 38890 (* 17640)	29710 (13470)	* 30740 (* 13940)	21790 (9890)	25510 (11570)	16860 (7650)	* 22560 (* 10230)	15050 (6830)	31.95' (9.74 m)
Ground Level					* 48700 (* 22090)	43870 (19900)	* 40920 (* 18560)	28890 (13110)	* 32100 (* 14560)	21260 (9640)	25200 (11430)	16580 (7520)	23340 (10580)	15400 (6990)	31.18' (9.52 m)
-5' (-1.5 m)			* 34700 (* 15740)	* 34700 (* 15740)	* 54380 (* 24670)	43800 (19870)	* 40790 (* 18500)	28600 (12970)	* 32040 (* 14530)	21030 (9540)	25160 (11410)	16530 (7500)	25110 (11390)	16510 (7490)	29.57' (9.03 m)
-10' (-3.0 m)	* 42510 (* 19280)	* 42510 (* 19280)	* 54600 (* 24770)	* 54600 (* 24770)	* 50010 (* 22680)	44210 (20050)	* 38300 (* 17370)	28740 (13040)	* 29820 (* 13530)	21160 (9600)			* 26010 (* 11800)	18830 (8540)	26.96' (8.25 m)
-15' (-4.5 m)			* 55400 (* 25130)	* 55400 (* 25130)	* 42160 (* 19120)	* 42160 (* 19120)	* 32300 (* 14650)	29370 (13320)					* 25900 (* 11750)	23840 (10820)	22.99' (7.06 m)

A Distance from center of rotation
B Height

NOTE: Lifting capacities are in compliance with SAE 1097 and ISO 10567. Machine in lifting mode with power boost turned on. Load point is the end of the arm. Rated loads shown do not exceed 75% of minimum tipping loads or 87% of hydraulic capacities. Rated loads marked with an asterisk (*) are limited by hydraulic capacities. The least stable position is over the side. The total mass of machine includes the mass of the boom, arm, counterweight, all operating fluids and 165 lb. (75 kg) operator.

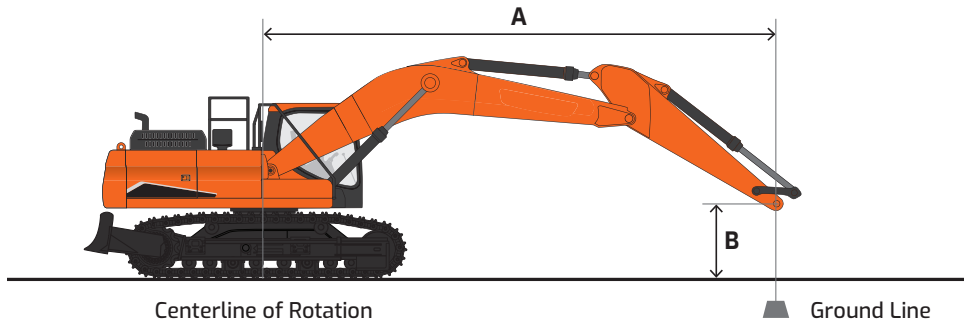

Lifting Capacity

Rating over front Rating over side or 360°


DX420LC-7 US30

Boom: 21' 11.8" (6700 mm) | Arm: 12' 11.5" (3950 mm) | Counterweight: 21605 lb. (9800 kg) | 35.4" (900 mm) TG Shoes | Bucket: None | Unit: lb. (kg)

A (ft. or m) B (ft. or m)	5' (1.5 m)		10' (3.0 m)		15' (4.5 m)		20' (6.0 m)		25' (7.5 m)		30' (9.0 m)		Max. Reach		
															A
30' (9.0 m)									* 20270 (* 9190)	* 20270 (* 9190)			* 16920 (* 7670)	* 16920 (* 7670)	25.82' (7.87 m)
25' (7.5 m)									* 19860 (* 9010)	* 19860 (* 9010)			* 15890 (* 7210)	* 15890 (* 7210)	29.42' (8.97 m)
20' (6.0 m)									* 21050 (* 9550)	* 21050 (* 9550)	* 20480 (* 9290)	17430 (7900)	* 15520 (* 7040)	15230 (6910)	31.86' (9.71 m)
15' (4.5 m)							* 26450 (* 12000)	* 26450 (* 12000)	* 23300 (* 10570)	22720 (10310)	* 21500 (* 9750)	17040 (7730)	* 15620 (* 7080)	13850 (6280)	33.39' (10.18 m)
10' (3.0 m)					* 42530 (* 19290)	* 42530 (* 19290)	* 31510 (* 14290)	30250 (13720)	* 26070 (* 11830)	21760 (9870)	* 22970 (* 10420)	16520 (7490)	* 16130 (* 7320)	13100 (5940)	34.14' (10.41 m)
5' (1.5 m)					* 50630 (* 22970)	43370 (19670)	* 36080 (* 16360)	28630 (12980)	* 28720 (* 13030)	20850 (9460)	* 24440 (* 11090)	16010 (7260)	* 17100 (* 7760)	12850 (5830)	34.16' (10.41 m)
Ground Level			* 20670 (* 9380)	* 20670 (* 9380)	* 52180 (* 23670)	41800 (18960)	* 39070 (* 17720)	27520 (12480)	* 30660 (* 13910)	20150 (9140)	24030 (10900)	15600 (7080)	* 18690 (* 8480)	13070 (5930)	33.46' (10.2 m)
-5' (-1.5 m)	* 23470 (* 10650)	* 23470 (* 10650)	* 32520 (* 14750)	* 32520 (* 14750)	* 54440 (* 24690)	41300 (18730)	* 40060 (* 18170)	26970 (12230)	31040 (14080)	19760 (8960)	23810 (10800)	15400 (6980)	* 21210 (* 9620)	13840 (6280)	31.99' (9.75 m)
-10' (-3.0 m)	* 35880 (* 16270)	* 35880 (* 16270)	* 47050 (* 21340)	* 47050 (* 21340)	* 51750 (* 23470)	41450 (18800)	* 38900 (* 17640)	26900 (* 12200)	* 30470 (* 13820)	19710 (8940)	* 23800 (* 10800)	15510 (7030)	* 23670 (* 10730)	15460 (7010)	29.6' (9.02 m)
-15' (-4.5 m)	* 50520 (* 22910)	* 50520 (* 22910)	* 63530 (* 28820)	* 63530 (* 28820)	* 46010 (* 20870)	42130 (19110)	* 35010 (* 15880)	27300 (* 12380)	* 26670 (* 12100)	20090 (9110)			* 24030 (* 10900)	18670 (8470)	26.09' (7.95 m)
-20' (-6.0 m)			* 47540 (* 21560)	* 47540 (* 21560)	* 35430 (* 16070)	* 35430 (* 16070)	* 25900 (* 11750)	* 25900 (* 11750)					* 23390 (* 10610)	* 23390 (* 10610)	20.87' (6.36 m)

A Distance from center of rotation
B Height

NOTE: Lifting capacities are in compliance with SAE 1097 and ISO 10567. Machine in lifting mode with power boost turned on. Load point is the end of the arm. Rated loads shown do not exceed 75% of minimum tipping loads or 87% of hydraulic capacities. Rated loads marked with an asterisk (*) are limited by hydraulic capacities. The least stable position is over the side. The total mass of machine includes the mass of the boom, arm, counterweight, all operating fluids and 165 lb. (75 kg) operator.

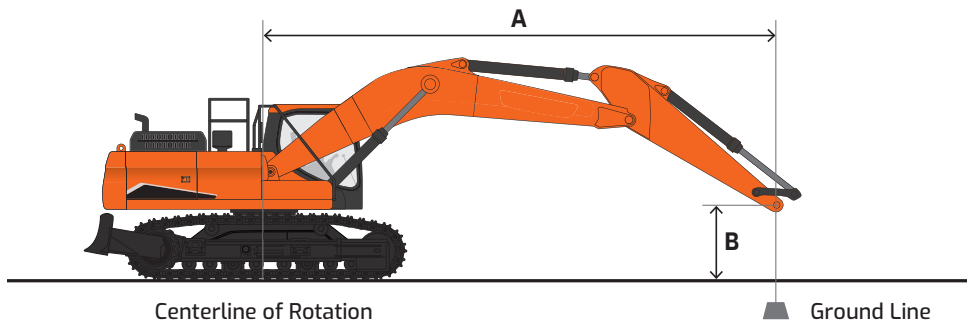

Standard & Optional Equipment

■ Standard ● Optional

Engine

Emissions (EPA), T4f	■
High-pressure common-rail (HPCR)	■
Variable geometry (VGT)	■
Cooled exhaust gas recirculation (CEGR)	■
Exhaust brake	■
Diesel oxidation catalyst (DOC)	■
Selective catalytic reduction (SCR)	■
Diesel exhaust fluid (DEF)	■
Fuel filter with water separator	■
Coolant expansion tank	■
Dual element dry-type air filter with evacuator	■
Precleaner	■
Electronic engine control (ECU)	■
Auto idle	■
Auto shutdown (time-adjustable)	■
Overheat & low oil pressure engine protection	■
Block heater (110 V)	■
Water separator with heater	■
Fuel filler pump	●

Hydraulic

Mechanics Design	■
Bent axis piston main pump (tandem)	■
Cross-sensing pump control	■
Pilot-operated control valves	■
Gear pilot pump	■
Smart Power Control (SPC)	■
Variable-speed hydraulic cooling fan	■
Axial piston swing motor	■
Spring-applied hydraulic release brake	■
Axial piston travel motor (high/low, auto)	■
Auxiliary hydraulics, one- & two-way piping	■
Auxiliary hydraulics, tilt/rotate piping	●
Adjustable auxiliary flow & pressure, 10 presets	■
Intelligent floating boom	●
Boom & arm lock valves	●

Controls

Joystick controls	■
Pattern control change valve (SAE, ISO)	■
Joystick attachment control, switches/buttons - Right (one-way, two-way, power boost) - Left (tilt/rotate, horn, one-touch decel)	■
Foot pedal attachment control	■
Control stands - Height adjustable - Sliding (fore/aft) - Tilting armrests	■
Engine speed control dial	■
Travel pedals with hand levers	■
Straight travel pedal	●
Switches, console-mounted - Starter button switch - Travel speed selector - Work light - Auxiliary mode switch	■
Emergency stop switch	■
Power modes (P+, P, S, E)	■
Work modes (digging, lifting, breaker, shear)	■
Smart Power Control (SPC)	■
Jog dial display control	■
Wiper control panel	■
Audio control panel	■

Cabin

Steel, all-weather & sound-suppressed	■
ROPS (ISO 12117-2:2008)	■
Viscous mount with spring reinforcement	■
Front window with wiper/washer	■
Tinted safety glass	■
Skylight top hatch with sun screen	■
Front window with sun screen	■
Pull-up type top front window	■
Removable lower front window with storage behind seat	■
Wiper, lower window	■
Adjustable sliding side door window	■
Defrost, front window	■
Lockable doors	■
Seat - Heated - Air-suspension - 2" (51 mm) seat belt - Adjustable height & recline - Adjustable fore/aft - Adjustable armrests	■
Leatherette seat - Heating & cooling - Air-suspension - 2" (51 mm) seat belt - Adjustable height & recline - Adjustable fore/aft - Adjustable armrests	●
Control stands - Height adjustable - Mounted to seat base	■
Storage for operator's manuals	■
Mirrors	■
Fully automatic HVAC with radiant energy photo sensor	■
8" multi-function LCD interactive display monitor	■
Cigarette lighter	■
Digital Bluetooth® & MP3 radio with cell phone integration	■
Speakers (2)	■
Antenna, roof-mounted	■
Emergency breakout tool	■
Hot/cold beverage compartment	■
Power socket, 12 V & 24 V	■
Cup holder	■
Interior light	■
Coat hanger	■
Rain shield	●
FOG guard	●
Front window guard	●

Electrical

System voltage – 24 V	■
Alternator – 28 V, 100 A	■
2 x 12 V batteries, 200 AH reserve capacity, 1300 CCA	■
Blade-type fuse panel	■
Main circuit breaker	■
Lights, work (halogen): machine (2), boom (2)	■
Lights, work (LED): machine (2), boom (2)	●
Lights, work (halogen): cabin (2)	●
Lights, work (halogen): cabin front (4), rear (2)	●
Rotating beacon	■
Overload warning alarm	●
Hour meter	■
Engine restart prevention system	■
Rearview camera	■
Side view camera, right side	●
Around view camera	●
Microphone & speaker	●
Ultrasonic sensor	●
Laptop service port	■
Self-diagnostics system	■
Smart Key (remote ignition key)	■
MY DEVELON (telematics)	■

Display Monitor & Warnings

Indicators - Power modes - Work modes - User/Service menu	■
Gauges - Fuel level - DEF level - Engine coolant temperature - Hydraulic oil temperature - Engine rpm - Battery voltage - Hydraulic pump pressure - ECO - Digital clock - Trip meter - Hour meter - Fuel consumption	■
Warning & indicator lights - Seat belt - Error code - SCR warning - Check engine - Engine oil pressure - Engine pre-heat engaged - Radiator coolant level & temperature - Air filter - Fuel level - DEF level – low - Water in fuel - Battery charge - Work lights on - Hydraulic oil temperature - Hydraulic charge pressure - Hydraulic pilot filter - Hydraulic return filter	■
Swing alarm	■
Travel alarm	■
Buzzer - Engine oil pressure - Coolant temperature	■

Undercarriage

Fixed track width	■
Track guards & chains with adjusters	■
Track rollers, upper	2
Track rollers, lower	9
In-shoe motor protection	■
Shoes, double grouser – 600 mm	●
Shoes, triple grouser – 600 mm	●
Shoes, triple grouser – 750 mm	●
Shoes, triple grouser – 800 mm	■
Shoes, triple grouser – 900 mm	■

Frame

Counterweight, fixed	■
----------------------	---

Other

Centralized lubrication - Boom - Arm - Swing	■
Handrails & service platforms	■
Skid-resistant steps & service platforms	■
Manuals - Operation & Maintenance - AEM Safety Manual	■
MY DEVELON 3-year subscription (telematics)	■
Vandalism protection - Lockable panels - Lockable fluid fill points - Anti-theft protection (password)	■
Vandalism window cover mount	●
Air compressor	●

Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual DEVELON equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors. Pictures of DEVELON units may show other than standard equipment.

Powered by Innovation

DEVELON

A brand of HD Hyundai Infracore.

na.develon-ce.com/dx420lc-7

DX420LC-7 Crawler Excavator Spec Sheet
Printed in the U.S.A.
23906_003_D092724

©2024 HD Hyundai Infracore. All rights reserved.