

DEVELON

Wheel Loader

DL220-7



Engine

Make	DEVELON
Model	DL06
Number of cylinders	6
Rated power, gross (hp per SAE J1995)	159.6 hp (119.0 kW) @ 2100 rpm
Rated power, net (hp per SAE J1349)	159.6 hp (119.0 kW) @ 2100 rpm
Max. torque, gross (SAE J1995)	542.8 lbf. ft (75.0 kgf) @ 1400 rpm
Displacement	360.0 in. ³ (5.9 L)
Bore and stroke	3.9" x 4.9" (100 mm x 125 mm)
Starter	24 V, 8.6 hp (6.0 kW)
Battery	2 x 12 V, 100 AH, 900 CCA
Alternator	24 V, 80 A
Air cleaner	Double elements

Hydraulics

Main pumps	Variable displacement axial piston pump 40.9 gpm (155.0 L/min.)
System pressure (work)	3625.9 psi (250.0 bar)
System pressure (steer)	2828.2 psi (195.0 bar)
Boom speed – up	6.2 sec
Boom speed – down	3.7 sec
Bucket speed – crowd	2.0 sec
Bucket speed – dump	1.5 sec

Travel Speeds

Travel speed – forward (4-speed)	4.3 / 7.9 / 14.9 / 24.2 mph (7.0 / 12.8 / 24.1 / 38.9 km/h)
Travel speed – forward (5-speed) (US15 package only)	4.0 / 8.1 / 12.4 / 18.6 / 24.9 mph (6.5 / 13.0 / 20.0 / 29.9 / 40.0 km/h)
Travel speed – reverse (4-speed)	4.6 / 8.3 / 15.7 mph (7.4 / 13.4 / 25.3 km/h)
Travel speed – reverse (5-speed) (US15 package only)	4.3 / 8.5 / 19.6 mph (6.9 / 13.7 / 31.5 km/h)
Max. grade	58% (30°)

Environment

Sound level (ISO 6395)	103 dB(A)
Cabin sound level (ISO 6396)	70 dB(A)

Refill Capacities

Fuel tank	62.1 gal. (235.0 L)
DEF tank	7.9 gal. (30.0 L)
Cooling system (radiator capacity)	8.9 gal. (34.0 L)
Engine oil	6.5 gal. (24.5 L)
Transmission	8.5 gal. (32.0 L)
Front axle	6.1 gal. (23.0 L)
Rear axles	6.1 gal. (23.0 L)
Hydraulic system	31.7 gal. (120.0 L)

All capacities are approximate values. Always refer to the machine's OM for exact refill levels. Check the dipstick, level eye, level plug, etc., to achieve the correct level.

Hydraulic Cylinders

Steering (2) bore x rod diameter x stroke	2.8" x 1.8" x 16.7" (70 mm x 45 mm x 425 mm)
Lift arm (2) bore x rod diameter x stroke	4.5" x 3.0" x 31.1" (115 mm x 75 mm x 790 mm)
Bucket (1) bore x rod diameter x stroke	5.1" x 3.1" x 20.3" (130 mm x 80 mm x 515 mm)

The piston rods and cylinder bodies are made of high-strength steel. A shock-absorbing mechanism is fitted in at the base and rod end of the lift and bucket cylinders and the rod end of the steering cylinders to ensure shock-free operation and extended piston life.



NOTE: Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) and ISO standards. Specifications and design are subject to change without notice. All dimensions are given for DEVELON wheel loaders equipped with standard tires. Pictures of DEVELON wheel loaders may show other than standard equipment. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. Rounding may impact specifications DEVELON construction equipment is manufactured with a Quality Management System that is in compliance with ISO 9001:2008.

Dimensions

		Standard Arm	High-Lift
Bucket capacity, heaped ISO/SAE		3.0 yd³ (2.3 m³)	
Bucket width	A	8' 4.0" (2550 mm)	
Max. hinge pin height	B	12' 7.6" (3850 mm)	14' 1.3" (4300 mm)
Dump height (45°) – fully raised	C	9' 2.8" (2815 mm)	10' 8.5" (3265 mm)
Dump reach (45°) – fully raised	D	3' 6.1" (1070 mm)	3' 4.4" (1025 mm)
Digging depth	E	2.4" (61 mm)	5.0" (127 mm)
Overall height, ROPS cabin	F	10' 10.3" (3313 mm)	
Overall length	G	24' 5.3" (7450 mm)	25' 8.9" (7845 mm)
Wheel base	H	10' 0.1" (3050 mm)	
Tread width	I	6' 4.0" (1930 mm)	
Ground clearance	J	1' 5.1" (434 mm)	
Max. tilt angle on ground*		42°	43°
Max. tilt angle at carry position	K	48°	48°
Max. tilt angle at fully raised	L	59°	61°
Max. dump angle at fully raised	M	48°	45°
Max. steering angle	N	40°	
External turning radius, bucket edge	O	19' 7.2" (5975 mm)	20' 2.3" (6155 mm)
External turning radius, outside tire	P	17' 8.8" (5404 mm)	
Tire size		20.5R25 L3	
Operating weight		29099 lb. (13199 kg)	29462 lb. (13364 kg)
Static tipping load (straight)		23210 lb. (10528 kg)	19520 lb. (8854 kg)
Static tipping load (at full turn)		20461 lb. (9281 kg)	17207 lb. (7805 kg)
Breakout force		21544 lbf. (95.8 kN)	21641 lbf. (96.3 kN)

*Not shown on diagram

Front Lift Arm Configuration
Standard: U510, U511, U515
High-Lift: U520, U521

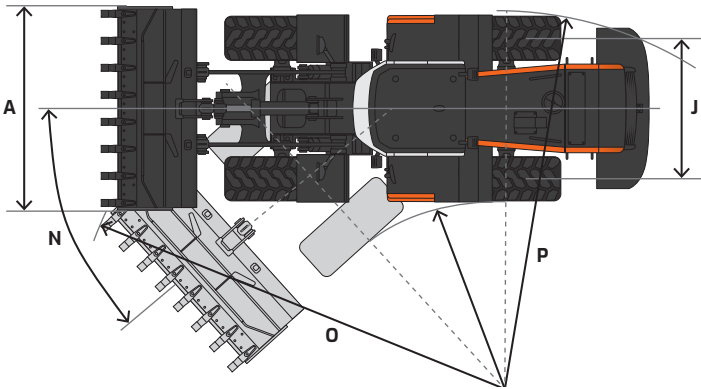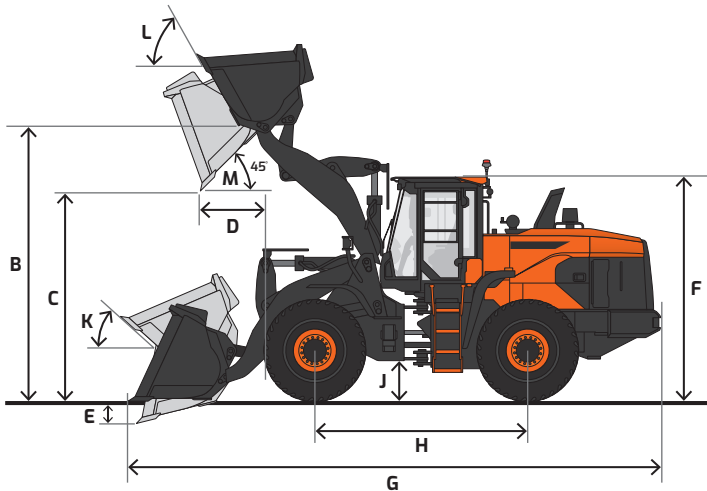

Standard & Optional Equipment

| Standard Base Package, US10

■ Standard ● Optional

Engine

Emissions (EPA), T4f	■
High-pressure common-rail (HPCR)	■
Cooled exhaust gas recirculation (CEGR)	■
Diesel oxidation catalyst (DOC)	■
Selective catalytic reduction (SCR)	■
Diesel exhaust fluid (DEF)	■
Fuel filter with water separator	■
Coolant recovery tank	■
Dual element dry-type air filter with evacuator	■
Precleaner	■
Electronic engine control (ECU)	■
Auto idle (working to standby)	■
Auto shutdown (time adjustable)	■
Overheat & low oil pressure engine protection	■
Cooling fan – radiator, variable speed	■
Cooling fan – radiator, automatic reversible	■
Remote drain port – engine oil	■
Block heater (110 V)	■

Hydraulic

Variable displacement axial piston pump	■
Closed-center system	■
Main control valves, pilot	■
Remote test ports	■
Remote drain port, hydraulic oil	■
Auxiliary hydraulics (3rd valve)	■
Automatic boom/lift kick-out, adjustable (in cab)	■
Automatic return-to-dig position, adjustable	■
Boom float	■
Ride control	■

Electrical

System voltage – 24 V	■
Alternator – 24 V, 80 A	■
2 x 12 V batteries, 100 AH reserve capacity, 900 CCA	■
Blade-type fuse panel	■
Main circuit breaker	■
Lights, work (LED): front (2), rear (2)	■
Lights, work (LED): front (4), rear (4)	●
Lights, work (LED): front (6), rear (6)	●
Lights, headlights (halogen): hi/lo beams (2)	■
Lights, stop, tail & direction indicators	■
Horn	■
Rotating beacon	■
Hour meter	■
Engine restart prevention system	■
Rearview camera	■
Laptop service port	■
Self-diagnostics system	■

Cabin

Steel, all-weather & sound-suppressed	■
ROPS (ISO 3471)	■
FOPS (ISO 3449, level II)	■
Front window with wiper/washer	■
Rear window with wiper	■
Tinted safety glass	■
Visor, retractable	■
Adjustable sliding side door window	■
Defrost, front window	■
Lockable doors	■
Seat	■
- Air-suspension	
- 3" (76 mm) seat belt	
- Adjustable height & recline	
- Adjustable fore/aft	
- Adjustable armrests	
Control stands	■
- Height adjustable	
- Fore/aft adjustable	
Storage for operator's manuals	■
Mirror, interior rearview (1)	■
Mirrors, exterior (2), heated	■
Mirrors, exterior (2), heated (electronic adjustable)	●
Fully automatic HVAC with ambient temperature sensor	■
Smart Touch display	■
- 8" touch-enabled	
- Adjustable height & angle	
Transparent Bucket	■
- Multi-camera system & controller	
- In-cab display	
AM/FM stereo with hands-free Bluetooth®	■
Speakers (2)	■
Antenna, roof-mounted	■
Emergency breakout tool	■
Power socket, 12 V	■
Power socket, USB	■
Cup holder	■
Interior light	■
Coat hanger	■

Controls

Adjustable steering column	■
- Tilting	
- Telescoping	
Emergency secondary steering	●
Throttle pedal (accelerator)	■
Brake pedal, right	■
Brake pedal, left	■
Intelligent clutch cutoff	■
Gear selector (FNR)	■
Joystick control	■
Switches, console-mounted	■
- Starter (button)	
- Parking brake	
- Pilot cutoff	
- Transmission cutoff	
- Work light	
- Reversible cooling fan	
Emergency stop switch	■
Power mode (P, S, E)	■
Transmission mode (manual / auto 1-4 / auto 2-4)	■
Wiper control panel	■
Audio control panel	■

Display Monitor & Warnings

Buzzer	
- Engine oil pressure	
- Coolant temperature	
- Transmission overheat	
Gauges	
- Fuel level	- ECO
- DEF level	- Smart guidance system
- Engine coolant temperature	- Digital clock
- Transmission oil temperature	- Trip meter
- Engine rpm	- Hour meter
- Speedometer	- Total operation time
- Transmission gear indicator	- Fuel consumption
- Battery voltage	
Warning & indicator lights	
- Seat belt	- Emergency steering
- Error code	- Hydraulic oil temperature
- SCR warning	- Hydraulic charge pressure warning
- Check engine	- Hydraulic pilot filter
- Engine oil pressure	- Hydraulic return filter
- Engine pre-heat engaged	- Transmission mode
- Radiator coolant level	- Transmission warning
& temperature	- Transmission lock-up
- Air filter	- Transmission oil temp
- Fuel level	- Transmission gear indicator
- DEF level – low	- Brake fluid pressure warning
- Water in fuel	- Reverse fan indicator
- Battery charge	- Mirror heat indicator
- Direction signal	- Parking brake indicator
- Lights (high, main, work, beacon)	
Back-up alarm	■
Scale system, integrated smart scale	●
Around view monitor (AVM)	●

Frame & Driveline

Z-bar lift arm	■
Z-bar lift arm, high-lift	●
Steering cylinders, double-acting (2)	■
Transmission – 4F/3R speed	■
- Full automatic – power shift	
- Torque converter	
Differentials	■
- Limited slip front/rear	
Differentials	●
- Hydraulic locking front	
- Open rear	
Hydraulic power steering	■
Outboard planetary axles	■
Fixed front axle	■
Oscillating rear axle	■
Spring-applied hydraulic release brake	■
Sealed, self-adjusting brakes	■
Tires, 20.5R25 L3 radial	■
Outboard brakes	■

Other

Centralized lubrication	■
Air-compressor	●
Handrails, entrance & service steps	■
Roof cover	■
Skid-resistant entrance steps	■
Skid-resistant service platforms	■
Drawbar & pin	■
Wheel chocks	■
Rear fender, full	●
Additional counterweight*	■
Manuals	■
- Operation & Maintenance	
- AEM Safety Manual	
MY DEVELON (telematics)	■
Vandalism protection	■
- Lockable panels	
- Lockable fluid fill points	
- Anti-theft protection (password)	

*Standard on high-lift models

Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual DEVELON equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors. Pictures of DEVELON units may show other than standard equipment.

Powered by Innovation

DEVELON

A brand of HD Hyundai Infracore.

na.develon-ce.com/dl220-7

DL220-7 Wheel Loader Spec Sheet
Printed in the U.S.A.
25903_007_D092225

©2025 HD Hyundai Infracore. All rights reserved.